


2 CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

1. Conductive Polymer Hybrid Aluminum Electrolytic Capacitor?

Conductive Polymer Hybrid Capacitor consist of Conductive Polymer Electric materials and Liquid Electrolyte as Electrolyte

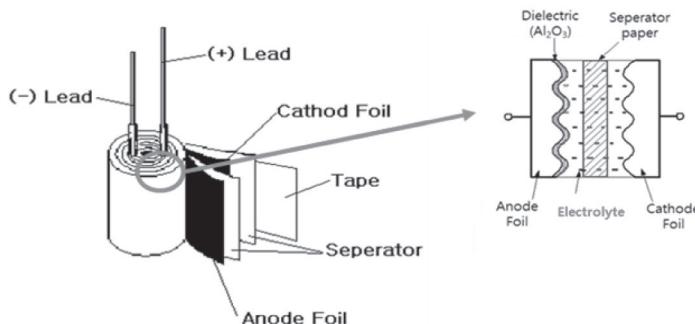

Section	Electrolytic Cap.	Solid Cap.	Hybrid Cap.
Electrolyte	Liquid Electrolyte	Conductive Polymer	Conductive Polymer + Liquid Electrolyte

2. Merits of Conductive Polymer Hybrid Aluminum Electrolytic Capacitor

By using conductive polymer as electrolyte, low ESR characteristics and high ripple characteristics can be realized. Low leakage current and short defect of capacitor can be prevented by electrolytic solution.


3. Characteristic

Section	Electrolyte Cap.	Solid Cap.	Hybrid cap.
SIZE	O	△	◎
ESR	X	O	◎
TEMPERATURE	X	O	◎
DISSIPATION FACTOR	X	O	◎
RIPPLE CURRENT	X	O	◎
RELIABILITY	X	O	◎
LEAKAGE CURRENT	O	X	◎

◎ Excellent O Good △ Average X Weak



● Taping Specifications for Chip Type Capacitors

● Carrier Tape

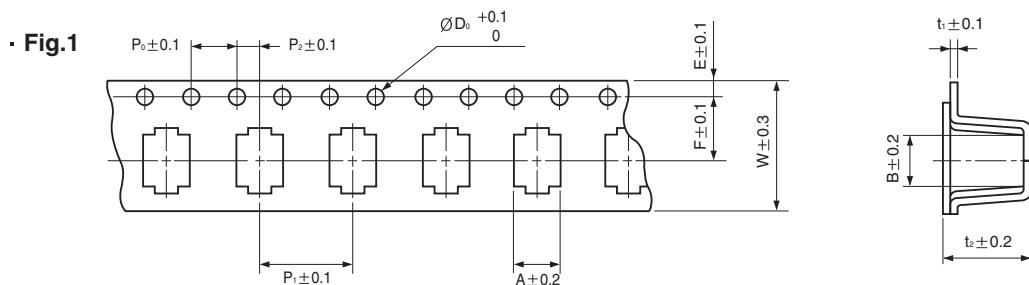


$\text{ØD} \times L$	A	B	ØD_0	E	F	P_0	P_1	P_2	t_1	t_2	W
6.3 × 7.7	7.0	7.0	1.5	1.75	7.5	4.0	12.0	2.0	0.4	8.2	16.0
8 × 10	8.7	8.7	1.5	1.75	11.5	4.0	16.0	2.0	0.4	11.0	24.0
10 × 10	10.7	10.7	1.5	1.75	11.5	4.0	16.0	2.0	0.4	11.0	24.0
10 × 12.5	10.7	10.7	1.5	1.75	11.5	4.0	16.0	2.0	0.5	13.0	24.0


● Reel (Taping code : VR, VG)

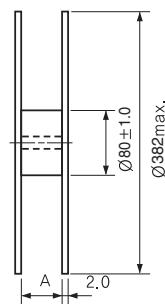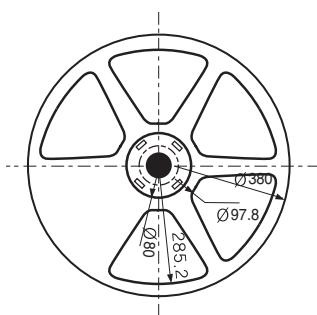

● Polarity

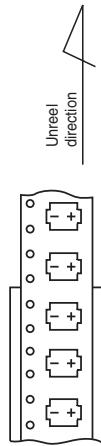

● Recommended Land Size

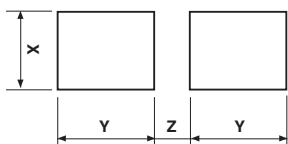

$\text{ØD} \times L$	A
6.3 × 7.7	16
8 × 10	24
10 × 10	24
10 × 12.5	24

$\text{ØD} \times L$	Q'ty/Reel(pcs.)	Q'ty/Box(pcs.)
6.3 × 7.7	900	9000
8 × 10	500	5000
10 × 10	500	5000
10 × 12.5	400	4000

Type	$\text{ØD} \times L$	X	Y	Z
VR	6.3 × 7.7	1.6	3.5	2.0
	8 × 10	2.5	3.5	3.0
	10 × 10	2.5	4.0	4.0
	10 × 12.5	2.5	4.0	4.0
VG	6.3 × 7.7	3.0	4.0	1.6
	8 × 10	4.3	5.3	2.0
	10 × 10	4.3	5.6	3.3
	10 × 12.5	4.3	5.6	3.3

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

YC Chip type, Standard Series




- Endurance with ripple current: 10000 hours at 105°C
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.

Item	Characteristics										
Operating temperature range	-55 ~ +105°C										
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63 ~ 100					
	$\tan\delta$	0.16	0.14	0.12	0.10	0.08					
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$										
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Capacitance change	Within $\pm 30\%$ of initial value									
	$\tan\delta$	Less than 200% of the specified value									
	ESR	Less than 200% of the specified value									
	Leakage current	Less than specified value									
Shelf life(at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 10\%$ of initial value									
	$\tan\delta$	Less than specified value									

DRAWING

Unit : mm

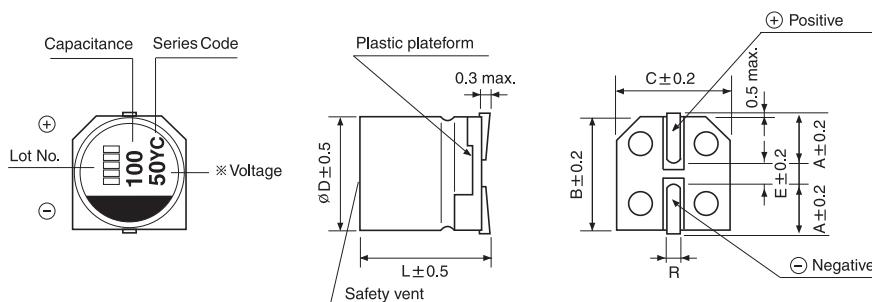

$\varnothing D \times L$	A	B	C	E	R
6.3×7.7	2.4	6.6	6.6	2.2	0.5~0.8
8×10	2.9	8.3	8.3	3.1	0.8~1.1
10×10	3.2	10.3	10.3	4.5	0.8~1.1
10×12.5	3.2	10.3	10.3	4.5	0.8~1.1

YC series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35		
47								6.3×7.7	35	2000
68				6.3×7.7	30	2000	6.3×7.7	35	2000	
100				6.3×7.7	30	2000	8×10	27	2300	
150	6.3×7.7	27	2200	8×10	27	2300	8×10	27	2300	
							10×10	20	2500	
220				8×10	27	2300				
270	8×10	22	2500	10×10	20	2500	10×10	20	2500	
330				10×10	20	2500	10×12.5	17	2800	
470	10×10	18	2600	10×12.5	16	2800				
560	10×12.5	14	3000							

μF	WV	50			63			80		
10				6.3×7.7	80	1500				
15	6.3×7.7	40	1600							
22				6.3×7.7	80	1500	8×10	45	1600	
				8×10	40	1600				
33	6.3×7.7	40	1600	8×10	40	1600				
				8×10	30	1800	10×10	35	1700	
39										
47	8×10	30	1800				10×12.5	32	1800	
56	10×10	25	2000	10×10	30	1800				
68	10×10	25	2000	10×12.5	22	2100				
100	10×10	25	2000							
150	10×12.5	19	2300							

μF	WV	100		
10	8×10	60	1450	
15	10×10	45	1500	
18	10×12.5	40	1580	

Ripple current (mA rms) at 105°C, 100kHz
 ESR (mΩ) at 20°C, 100kHz
 Case size ØD × L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

YH Chip type, High Temperature Series




- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.

Item	Characteristics										
Operating temperature range	-55 ~ +125°C										
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63 ~ 100					
	$\tan\delta$	0.16	0.14	0.12	0.10	0.08					
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$										
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Capacitance change	Within $\pm 30\%$ of initial value									
	$\tan\delta$	Less than 200% of the specified value									
	ESR	Less than 200% of the specified value									
	Leakage current	Less than specified value									
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 10\%$ of initial value									
	$\tan\delta$	Less than specified value									

DRAWING

Unit : mm

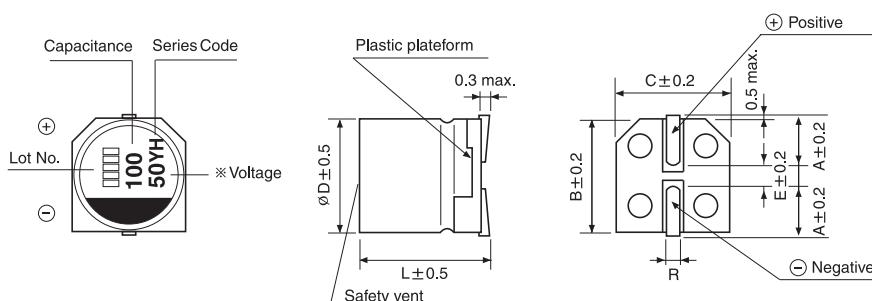

$\varnothing D \times L$	A	B	C	E	R
6.3 × 7.7	2.4	6.6	6.6	2.2	0.5~0.8
8 × 10	2.9	8.3	8.3	3.1	0.8~1.1
10 × 10	3.2	10.3	10.3	4.5	0.8~1.1
10 × 12.5	3.2	10.3	10.3	4.5	0.8~1.1

YH series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35		
47								6.3×7.7	35	1400
68				6.3×7.7	30	1400		6.3×7.7	35	1400
100				6.3×7.7	30	1400	8×10	27	1600	
150	6.3×7.7	27	1450	8×10	27	1600	8×10	27	1600	
							10×10	20	2000	
220				8×10	27	1600				
270	8×10	22	1700	10×10	20	2000	10×10	20	2000	
330				10×10	20	2000	10×12.5	17	2260	
470	10×10	18	2100	10×12.5	16	2260				
560	10×12.5	14	2320							

μF	WV	50			63			80		
10				6.3×7.7	80	900				
15	6.3×7.7	40	1100							
22				6.3×7.7	80	900	8×10	45	1100	
				8×10	40	1100				
33	6.3×7.7	40	1100	8×10	40	1100				
				8×10	30	1400				
39							10×10	35	1200	
47	8×10	30	1250				10×12.5	32	1400	
56	10×10	25	1600	10×10	30	1400				
68	10×10	25	1600	10×12.5	22	1650				
100	10×10	25	1600							
150	10×12.5	19	1820							

μF	WV	100		
10		8×10	60	900
15		10×10	45	1120
18		10×12.5	40	1220



● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

New



Chip type, High Temperature Series




- High temperature compared with YH series
- High temperature range, for 135°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.

YH → YK
High temp.

Item	Characteristics														
Operating temperature range	-55 ~ +135°C														
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)														
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C														
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>$\tan\delta$</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> </tr> </table>					WV	25	35	50	63	$\tan\delta$	0.14	0.12	0.10	0.08
WV	25	35	50	63											
$\tan\delta$	0.14	0.12	0.10	0.08											
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$														
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours(2000 hours for $\emptyset D=6.3$) at 135°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.														
	<table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> </table>					Capacitance change	Within $\pm 30\%$ of initial value	$\tan\delta$	Less than 200% of the specified value	ESR	Less than 200% of the specified value	Leakage current	Less than specified value		
Capacitance change	Within $\pm 30\%$ of initial value														
$\tan\delta$	Less than 200% of the specified value														
ESR	Less than 200% of the specified value														
Leakage current	Less than specified value														
Shelf life(at 135°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4														
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.														
	<table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within $\pm 10\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than specified value</td> </tr> </table>					Leakage current	Less than specified value	Capacitance change	Within $\pm 10\%$ of initial value	$\tan\delta$	Less than specified value				
Leakage current	Less than specified value														
Capacitance change	Within $\pm 10\%$ of initial value														
$\tan\delta$	Less than specified value														

DRAWING

Unit : mm

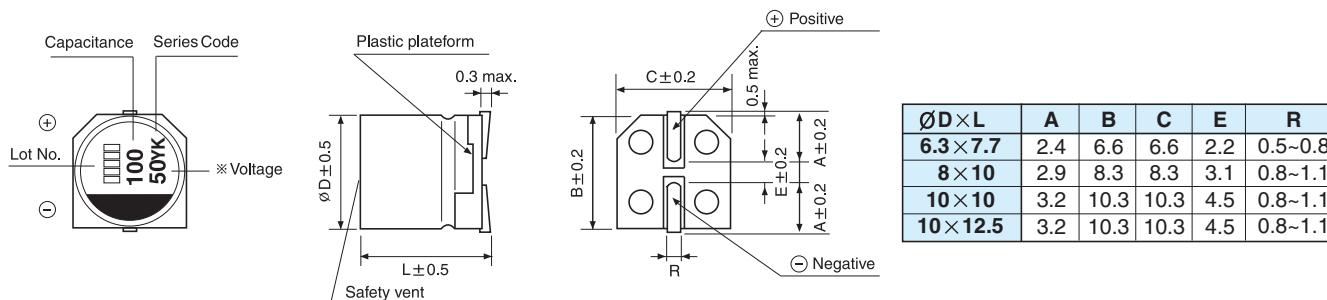

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	25	35	50	63	
33						8 × 10 40 1100
47				8 × 10 30 1250		
56						10 × 10 30 1400
68		6.3 × 7.7	35 1400			
82						
100	6.3 × 7.7	30 1400		10 × 10 25 1600		
150			8 × 10 27 1600			
220						
270	8 × 10	27 1600	10 × 10 20 2000			
330	10 × 10	20 2000	10 × 12.5 17 2260			
470	10 × 12.5	16 2260				

↑ ↑

Ripple current (mA rms) at 135°C, 100kHz

ESR ($m\Omega$) at 20°C, 100kHz
Case size $\emptyset D \times L$ (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



Upgrade



Chip type, Ultra High Temperature Series

- High temperature range, for 150°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.


S
Solvent Proof



Item	Characteristics								
Operating temperature range	-55 ~ +150°C								
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	25	35	50	63				
	$\tan\delta$	0.14	0.12	0.1	0.08				
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$								
Load life	After an application of DC bias voltage plus the rated AC ripple current for 1000 hours at 150°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Capacitance change	Within $\pm 30\%$ of initial value							
	$\tan\delta$	Less than 200% of the specified value							
	ESR	Less than 200% of the specified value							
	Leakage current	Less than specified value							
Shelf life(at 150°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 10\%$ of initial value							
	$\tan\delta$	Less than specified value							

Unit : mm

DRAWING

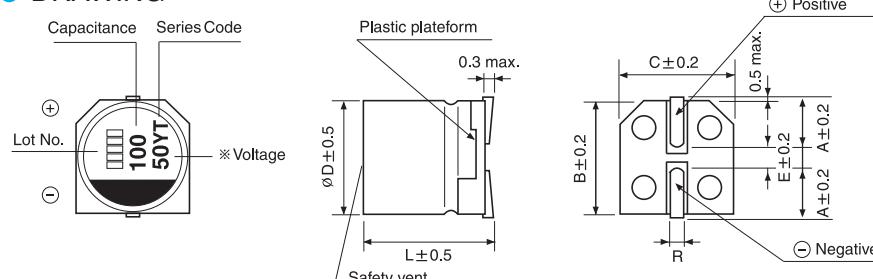

$\varnothing D \times L$	A	B	C	E	R
6.3 × 7.7	2.4	6.6	6.6	2.2	0.5~0.8
8 × 10	2.9	8.3	8.3	3.1	0.8~1.1
10 × 10	3.2	10.3	10.3	4.5	0.8~1.1
10 × 12.5	3.2	10.3	10.3	4.5	0.8~1.1

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	25		35		50		63	
15								6.3 × 7.7	80
22									410
33								8 × 10	40
47			6.3 × 7.7	60	510				610
56						8 × 10	35	10 × 10	30
68	6.3 × 7.7	45	540			660		10 × 12.5	710
100				8 × 10	30	710	28	780	
120						10 × 12.5	19	890	
150	8 × 10	27	740	10 × 10	23	830			
220				10 × 12.5	17	950			
270	10 × 10	22	850						
330	10 × 12.5	16	970						

↑ ↑ ↑

Ripple current (mA rms) at 150°C, 100kHz
ESR ($m\Omega$) at 20°C, 100kHz
Case size $\varnothing D \times L$ (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

Upgrade



Chip type, High Capacitance & High Ripple Current
Series



- High ripple current compared with YH series
- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.


YH → YM
High ripple



Item	Characteristics										
Operating temperature range	-55 ~ +125°C										
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63					
	$\tan\delta$	0.16	0.14	0.12	0.1	0.08					
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$										
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Capacitance change	Within $\pm 30\%$ of initial value									
	$\tan\delta$	Less than 200% of the specified value									
	ESR	Less than 200% of the specified value									
	Leakage current	Less than specified value									
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 10 seconds.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 10\%$ of initial value									
	$\tan\delta$	Less than specified value									

DRAWING

Unit : mm

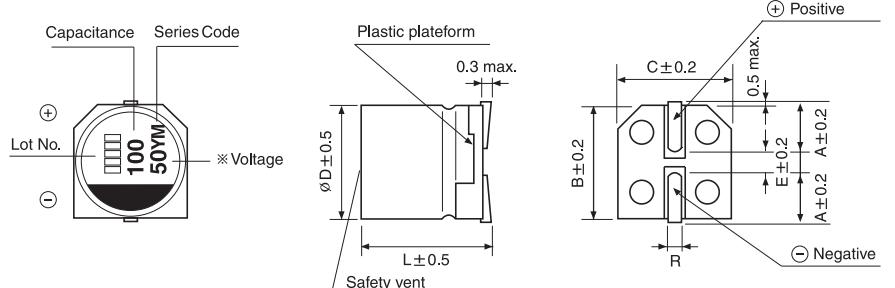

ØD × L	A	B	C	E	R
6.3 × 7.7	2.4	6.6	6.6	2.2	0.5~0.8
8 × 10	2.9	8.3	8.3	3.1	0.8~1.1
10 × 10	3.2	10.3	10.3	4.5	0.8~1.1
10 × 12.5	3.2	10.3	10.3	4.5	0.8~1.1

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35			50			63		
47											6.3 × 7.7	40	1500	8 × 10	40	1700
82														10 × 10	30	2000
100								6.3 × 7.7	35	1700	8 × 10	30	1700	10 × 12.5	22	3000
150	6.3 × 7.7	27	1800	6.3 × 7.7	30	1800	8 × 10	27	2000	10 × 10	25	2000				
220											10 × 12.5	19	3200			
330				8 × 10	27	2000	10 × 10	20	2800							
390	8 × 10	22	2000				10 × 12.5	17	3500							
560				10 × 10	20	2800										
680	10 × 10	18	2800	10 × 12.5	16	3500										
820	10 × 12.5	14	3500													

Ripple current (mA rms) at 125°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size ØD × L(mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

YB

Lead type, Standard
Series




- Endurance with ripple current: 10000 hours at 105°C
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.


Item	Characteristics													
Operating temperature range	-55 ~ +105°C													
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)													
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C													
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63 ~ 100								
	$\tan\delta$	0.16	0.14	0.12	0.10	0.08								
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$													
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage. <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> </table>						Capacitance change	Within $\pm 30\%$ of initial value	$\tan\delta$	Less than 200% of the specified value	ESR	Less than 200% of the specified value	Leakage current	Less than specified value
Capacitance change	Within $\pm 30\%$ of initial value													
$\tan\delta$	Less than 200% of the specified value													
ESR	Less than 200% of the specified value													
Leakage current	Less than specified value													
Shelf life(at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4													

Unit : mm

DRAWING

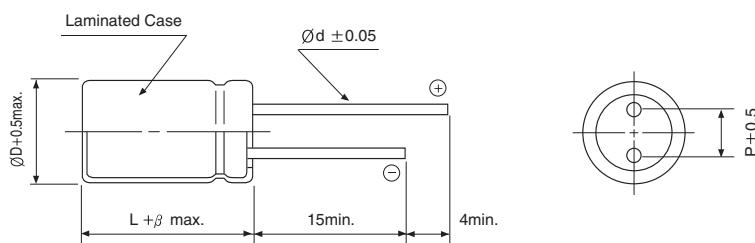

Size	ØD	L	P	Ød	β
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5
10×12	10.0	12.0	5.0	0.60	1.5

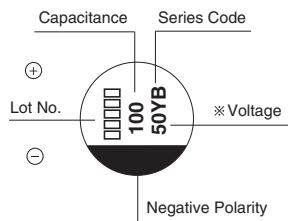

PACKING & TAPING (See page 82~84)

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS


YB series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35		
47								6.3×7.5	35	2000
68				6.3×7.5	30	2000	6.3×7.5	35	2000	
100				6.3×7.5	30	2000	8×9.5	27	2300	
150	6.3×7.5	27	2200	8×9.5	27	2300	8×9.5	27	2300	
							10×9.5	20	2500	
220				8×9.5	27	2300				
270	8×9.5	22	2500	10×9.5	20	2500	10×9.5	20	2500	
330				10×9.5	20	2500	10×12	17	2800	
470	10×9.5	18	2600	10×12	16	2800				
560	10×12	14	3000							

μF	WV	50			63			80		
10					6.3×7.5	80	1500			
15	6.3×7.5	40	1600							
22					6.3×7.5	80	1500	8×9.5	45	1600
					8×9.5	40	1600			
33	6.3×7.5	40	1600		8×9.5	40	1600			
					10×9.5	30	1800			
39								10×9.5	35	1700
47	8×9.5	30	1800					10×12	32	1800
56	10×9.5	25	2000	10×9.5	30	1800				
68	10×9.5	25	2000	10×12	22	2100				
100	10×9.5	25	2000							
150	10×12	19	2300							

μF	WV	100		
10	8×9.5	60	1450	
15	10×9.5	45	1500	
18	10×12	40	1580	


 Ripple current (mA rms) at 105°C, 100kHz
 ESR (mΩ) at 20°C, 100kHz
 Case size ØD×L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

YG Lead type, High Temperature Series




- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.




Item	Characteristics					
Operating temperature range	-55 ~ +125°C					
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)					
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C					
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63 ~ 100
	$\tan\delta$	0.16	0.14	0.12	0.10	0.08
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$					
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.					
	Capacitance change	Within $\pm 30\%$ of initial value				
	$\tan\delta$	Less than 200% of the specified value				
	ESR	Less than 200% of the specified value				
	Leakage current	Less than specified value				
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4					

Unit : mm

DRAWING

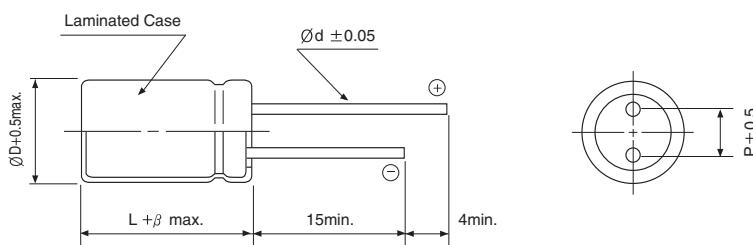

Size	ØD	L	P	Ød	β
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5
10×12	10.0	12.0	5.0	0.60	1.5

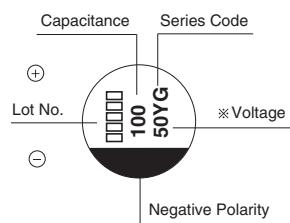

PACKING & TAPING (See page 82~84)

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

YG series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35		
47								6.3×7.5	35	1400
68				6.3×7.5	30	1400	6.3×7.5	35	1400	
100				6.3×7.5	30	1400	8×9.5	27	1600	
150	6.3×7.5	27	1450	8×9.5	27	1600	8×9.5	27	1600	
							10×9.5	20	2000	
220				8×9.5	27	1600				
270	8×9.5	22	1700	10×9.5	20	2000	10×9.5	20	2000	
330				10×9.5	20	2000	10×12	17	2260	
470	10×9.5	18	2100	10×12	16	2260				
560	10×12	14	2320							

μF	WV	50			63			80		
10					6.3×7.5	80	900			
15	6.3×7.5	40	1100							
22					6.3×7.5	80	900	8×9.5	45	1100
					8×9.5	40	1100			
33	6.3×7.5	40	1100		8×9.5	40	1100			
					10×9.5	30	1400			
39								10×9.5	35	1200
47	8×9.5	30	1250					10×12	32	1400
56	10×9.5	25	1600	10×9.5	30	1400				
68	10×9.5	25	1600	10×12	22	1650				
100	10×9.5	25	1600							
150	10×12	19	1820							

μF	WV	100		
10	8×9.5	60	900	
15	10×9.5	45	1120	
18	10×12	40	1220	

↑ ↑ ↑
Ripple current (mA rms) at 125°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size ØD×L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS



Upgrade
YF

Lead type, Ultra High Temperature Series

Solvent Proof


- High temperature range, for 150°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.



Item	Characteristics				
Operating temperature range	-55 ~ +150°C				
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)				
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C				
Dissipation factor max. (at 120Hz, 20°C)	WV	25	35	50	63
	$\tan\delta$	0.14	0.12	0.1	0.08
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25^\circ C) / Z(+20^\circ C) \leq 1.5$ $Z(-55^\circ C) / Z(+20^\circ C) \leq 2.0$				
Load life	After an application of DC bias voltage plus the rated AC ripple current for 1000 hours at 150°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.				
	Capacitance change	Within $\pm 30\%$ of initial value			
	$\tan\delta$	Less than 200% of the specified value			
	ESR	Less than 200% of the specified value			
	Leakage current	Less than specified value			
Shelf life(at 150°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4				

Unit : mm

DRAWING

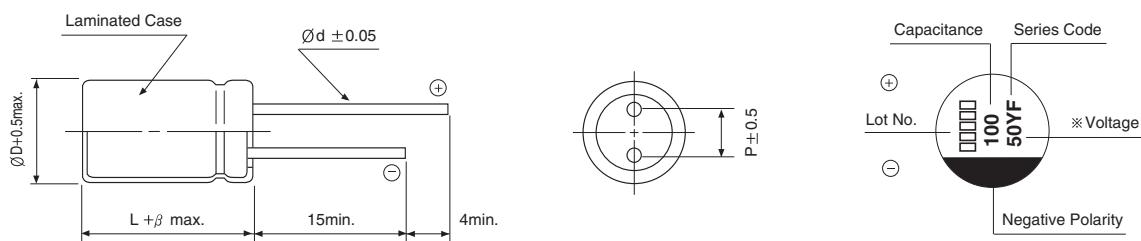

Size	ØD	L	P	Ød	β
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5
10×12	10.0	12.0	5.0	0.60	1.5

PACKING & TAPING (See page 82~84)

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	25			35			50			63		
15											6.3×7.5	80	410
22											8×9.5	40	610
33											10×9.5	30	710
47				6.3×7.5	60	510					10×12	22	810
56								8×9.5	35	660			
68	6.3×7.5	45	540										
100					8×9.5	30	710	10×9.5	28	780			
120								10×12	19	890			
150	8×9.5	27	740	10×9.5	23	830							
220					10×12	17	950						
270	10×9.5	22	850										
330	10×12	16	970										

↑ ↑ ↑ Ripple current (mA rms) at 150°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size ØD × L (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	100kHz
Coefficient	0.05	0.30	0.70	1.00

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS


Upgrade



Lead type, High Capacitance & High Ripple Current
Series




- High ripple current compared with YG series
- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.

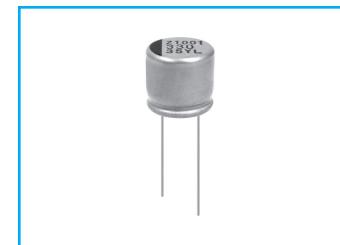

Item	Characteristics													
Operating temperature range	-55 ~ +125°C													
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)													
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C													
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63								
	$\tan\delta$	0.16	0.14	0.12	0.1	0.08								
Low temperature characteristics (Impedance ratio at 100kHz)	$Z(-25°C) / Z(+20°C) \leq 1.5$ $Z(-55°C) / Z(+20°C) \leq 2.0$													
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.													
	<table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of initial value</td> </tr> <tr> <td>$\tan\delta$</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 200% of the specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> </table>						Capacitance change	Within $\pm 30\%$ of initial value	$\tan\delta$	Less than 200% of the specified value	ESR	Less than 200% of the specified value	Leakage current	Less than specified value
Capacitance change	Within $\pm 30\%$ of initial value													
$\tan\delta$	Less than 200% of the specified value													
ESR	Less than 200% of the specified value													
Leakage current	Less than specified value													
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4													

DRAWING

Unit : mm

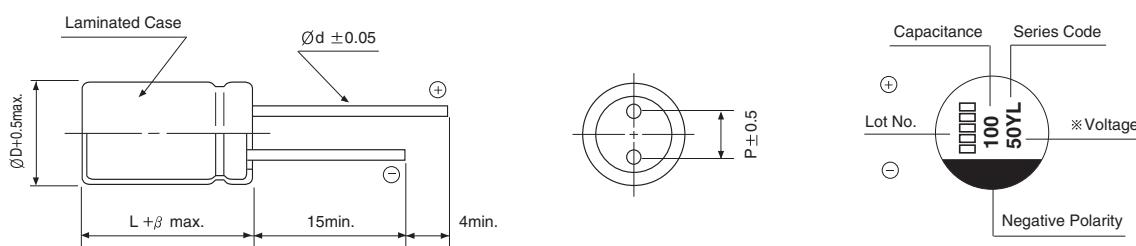

Size	$\varnothing D$	L	P	$\varnothing d$	β
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5
10×12	10.0	12.0	5.0	0.60	1.5

PACKING & TAPING (See page 82~84)

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	16			25			35			50			63		
47											6.3×7.5	40	1500	8×9.5	40	1700
82														10×9.5	30	2000
100								6.3×7.5	35	1700	8×9.5	30	1700	10×12.5	22	3000
150	6.3×7.5	27	1800	6.3×7.5	30	1800	8×9.5	27	2000	10×9.5	25	2000				
220											10×12.5	19	3200			
330				8×9.5	27	2000	10×9.5	20	2800							
390	8×9.5	22	2000				10×12.5	17	3500							
560				10×9.5	20	2800										
680	10×9.5	18	2800	10×12	16	3500										
820	10×12	14	3500													

Ripple current (mA rms) at 125°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size $\varnothing D \times L$ (mm)