


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

KN series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10			16			25		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
47							5 × 11	0.150	405
56				5 × 11	0.150	405	6.3 × 11	0.065	760
100	5 × 11	0.150	405	6.3 × 11	0.065	760	8 × 11.5	0.060	850
220	6.3 × 11	0.065	760	8 × 11.5	0.060	850	8 × 11.5	0.036	1000
330	8 × 11.5	0.060	850	8 × 11.5	0.036	1000	8 × 15	0.028	1250
							10 × 12.5	0.027	1430
470	8 × 11.5	0.036	1000	8 × 15	0.028	1250	8 × 20	0.020	1600
				10 × 12.5	0.027	1430	10 × 16	0.020	1820
680	8 × 15	0.028	1250	8 × 20	0.020	1600	10 × 20	0.014	2180
	10 × 12.5	0.027	1430	10 × 16	0.020	1820	12.5 × 16	0.018	2200
820	10 × 12.5	0.025	1500	10 × 16	0.018	2000	10 × 25	0.013	2360
1000	8 × 20	0.020	1600	10 × 20	0.014	2180	12.5 × 20	0.013	2480
	10 × 16	0.020	1820	12.5 × 16	0.018	2200			
1200	10 × 20	0.014	2180	10 × 25	0.013	2360	12.5 × 20	0.013	2600
	12.5 × 16	0.018	2200						
1500	10 × 25	0.013	2360	12.5 × 20	0.013	2480	12.5 × 25	0.012	2900
2200	12.5 × 20	0.013	2480	12.5 × 25	0.012	2900			
3300	12.5 × 25	0.012	3200						

WV Item μF	35			50		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33	5 × 11	0.150	405			
47	6.3 × 11	0.100	550	6.3 × 11	0.140	405
56	6.3 × 11	0.065	760	6.3 × 11	0.140	580
100	8 × 11.5	0.050	850	8 × 11.5	0.072	760
150	8 × 11.5	0.036	1000	10 × 12.5	0.061	1030
220	8 × 15	0.028	1250	10 × 16	0.042	1430
	10 × 12.5	0.027	1430			
270	8 × 20	0.020	1600	12.5 × 16	0.042	1700
330	10 × 16	0.020	1820	10 × 20	0.030	1820
470	10 × 20	0.014	2180	12.5 × 20	0.027	2360
	12.5 × 16	0.018	2200			
560	10 × 25	0.015	2360	12.5 × 25	0.020	2500
680	12.5 × 20	0.015	2480			
1000	12.5 × 25	0.015	2900			


RPLow Impedance
Series**LZ**
Low Impedance**LL**
Long Life**S**
Solvent ProofRZ → **RP**
Long life

- High reliability long life(10000 hours)
- Operating temperature -55 ~ +105°C
- Enabled high ripple current by a reduction of impedance at high frequency
- Ideally suited for use in switching power supply, main board
- Complied to the RoHS directive

Item	Characteristics						
Operating temperature range	-55 ~ +105°C						
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes)						
Capacitance tolerance	±20% at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.						
	WV	6.3	10	16	25	35	50
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16 ~ 25	35 ~ 50		
	Z-55°C/Z+20°C	3	3	3	3		
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.						
	Leakage current	Less than specified value					
	Capacitance change	Within ±20% of initial value					
	tanδ	Less than 200% of specified value					
	ØD	ØD = 5, 6.3	ØD = 8	ØD = 10	ØD ≥ 12.5		
Shelf life (at 105°C)	Life time	4000 hours	6000 hours	7000 hours	10000 hours		
	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

● DRAWING

Unit : mm

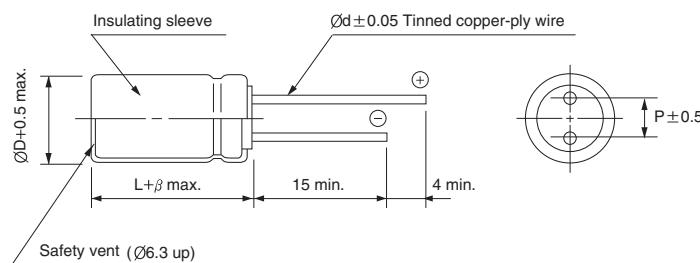

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β		1.5			2.0		

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency μF	120Hz	1kHz	10kHz	50kHz	100kHz ≤
~ 33	0.40	0.65	0.82	0.91	1.00
47 ~ 270	0.50	0.70	0.84	0.92	1.00
330 ~ 680	0.55	0.75	0.86	0.93	1.00
820 ~ 1800	0.60	0.80	0.88	0.94	1.00
2200 ~	0.70	0.85	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16		
	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
47							5 × 11	0.65	180
68				5 × 11	0.65	180	6.3 × 11	0.30	280
100	5 × 11	0.65	180	5 × 11	0.65	180	6.3 × 11	0.30	280
150	5 × 11	0.65	280	6.3 × 11	0.30	280	6.3 × 11	0.30	280
220	6.3 × 11	0.30	280	6.3 × 11	0.30	280	8 × 11.5	0.14	450
330	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.14	450
470	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.10	660
680	10 × 12.5	0.10	660	10 × 12.5	0.10	660	10 × 16	0.08	850
1000	10 × 12.5	0.10	660	10 × 16	0.08	850	10 × 20	0.054	1100
1500	10 × 20	0.054	1100	10 × 20	0.054	1100	12.5 × 20	0.050	1400
2200	12.5 × 20	0.050	1400	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700
3300	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 25	0.030	2100
4700	16 × 25	0.030	2100	16 × 31.5	0.030	2100	16 × 25	0.025	2600
6800	16 × 25	0.030	2100	16 × 31.5	0.025	2600	16 × 35.5	0.022	3000
10000	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
15000	18 × 35.5	0.022	3000						

WV Item μF	25			35			50		
	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0							5 × 11	3.5	40
2.2							5 × 11	3.0	55
3.3							5 × 11	2.6	65
4.7							5 × 11	2.3	90
6.8							5 × 11	1.4	120
10							5 × 11	1.4	120
22				5 × 11	0.70	180	5 × 11	1.2	150
33	5 × 11	0.70	180	5 × 11	0.65	180	6.3 × 11	0.85	200
47	5 × 11	0.65	180	6.3 × 11	0.30	280	6.3 × 11	0.70	250
68	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
100	6.3 × 11	0.30	280	8 × 11.5	0.14	450	8 × 11.5	0.24	340
150	8 × 11.5	0.14	450	8 × 11.5	0.14	450	10 × 12.5	0.17	490
220	8 × 11.5	0.14	450	10 × 12.5	0.10	660	10 × 16	0.12	650
330	10 × 12.5	0.10	660	10 × 16	0.080	850	10 × 20	0.10	810
470	10 × 16	0.080	850	10 × 20	0.054	1100	12.5 × 20	0.085	1100
680	10 × 20	0.054	1100	12.5 × 20	0.050	1400	12.5 × 25	0.065	1200
1000	12.5 × 20	0.050	1400	12.5 × 25	0.038	1700	16 × 31.5	0.043	1600
1500	16 × 25	0.030	1400	16 × 31.5	0.030	2100	16 × 31.5	0.038	2000
2200	16 × 25	0.030	2100	16 × 31.5	0.025	2600	18 × 35.5	0.034	2300
3300	16 × 31.5	0.025	2600	18 × 35.5	0.022	3000			
4700	18 × 35.5	0.022	3000						

WF

High ripple current,
Extremely Low Impedance Series



Low Impedance




Long Life



Solvent Proof

WL → WF
Long life




- Operating temperature range of $-40 \sim +105^{\circ}\text{C}$
- Extremely low impedance at high frequency
- High reliability withstanding 10000 hours load life at 105°C
- For E-meter
- Complied to the RoHS directive

Item	Characteristics								
Operating temperature range	$-40 \sim +105^{\circ}\text{C}$								
Leakage current max.	$I = 0.03\text{CV}$ or $3\mu\text{A}$ whichever is greater (after 2 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	Capacitance $> 1000\mu\text{F}$: $\tan\delta$ increases by 0.02 for each $1000\mu\text{F}$ from below value.								
	WV	6.3	10	16	25	35	50	63	100
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50	63	100
	Z-40°C/Z+20°C	8	6	4	4	4	4	3	3
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C . The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 25\%$ of initial value							
	$\tan\delta$	Less than 200% of specified value							
	$\varnothing D$	$\varnothing D = 5, 6.3$			$\varnothing D = 8, 10$	$\varnothing D \geq 12.5$			
	Life time	5000 hours			7000 hours	10000 hours			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

● DRAWING

Unit : mm

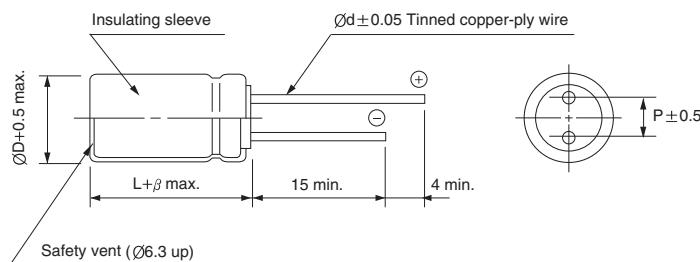

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 33		0.40	0.65	0.82	0.91	1.00
47 ~ 220		0.50	0.70	0.84	0.92	1.00
330 ~ 470		0.55	0.75	0.86	0.93	1.00
~ 1000		0.60	0.80	0.88	0.94	1.00
2200 ~		0.70	0.85	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

WF series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33										5×11	0.90	150
47							5×11	0.90	150	5×11	0.90	150
100	5×11	0.90	150	5×11	0.90	150	6.3×11	0.40	250	6.3×11	0.40	250
220	6.3×11	0.40	250	6.3×11	0.40	250	8×11.5	0.25	400	8×11.5	0.25	400
330	6.3×11	0.40	250	8×11.5	0.25	400	8×11.5	0.25	400	10×12.5	0.16	580
470	8×11.5	0.25	400	8×11.5	0.25	400	10×12.5	0.16	580	10×16	0.120	770
1000	10×12.5	0.16	580	10×16	0.120	770	10×20	0.078	1050	12.5×20	0.062	1300
2200	12.5×20	0.062	1300	12.5×20	0.062	1300	12.5×25	0.048	1650	16×25	0.034	1850
3300	12.5×20	0.062	1300	12.5×25	0.048	1650	16×25	0.034	1850	16×31.5	0.029	2000
4700	16×25	0.034	1850	16×25	0.034	1850	16×31.5	0.029	2000	18×35.5	0.025	2200
6800	16×25	0.034	1850	16×31.5	0.029	2000	18×35.5	0.025	2200			
10000	16×31.5	0.029	2000	18×35.5	0.025	2200						
15000	18×35.5	0.025	2200									

WV Item μF	35			50			63			100		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5×11	4.0	50				5×11	4.5	20
2.2				5×11	2.5	55				5×11	3.0	30
3.3				5×11	2.2	65				5×11	2.7	40
4.7				5×11	1.9	88				5×11	2.5	65
10				5×11	1.5	100	5×11	2.3	87	6.3×11	1.2	140
22				5×11	0.9	150	6.3×11	1.30	140	8×11.5	0.63	160
33	5×11	0.90	150	6.3×11	0.40	250	6.3×11	1.20	140	10×12.5	0.43	230
47	6.3×11	0.4	250	6.3×11	0.4	400	8×11.5	0.63	210	10×12.5	0.43	230
										10×16	0.31	290
100	8×11.5	0.25	400	8×11.5	0.25	500	10×12.5	0.43	300	12.5×16	0.23	
										12.5×20	0.16	750
220	10×12.5	0.16	580	10×16	0.12	770	10×25	0.210	520	16×25	0.073	900
330	10×16	0.120	770	10×20	0.08	1050	12.5×20	0.160	660	16×25	0.073	900
390	10×20	0.095	900	10×20	0.075	1170	12.5×25	0.140	700	12.5×34.5	0.073	1650
470	10×20	0.078	1050	12.5×20	0.062	1300	12.5×25	0.120	750			
1000	12.5×25	0.048	1650	16×25	0.034	1850	16×31.5	0.054	1390			
2200	16×31.5	0.029	2000	18×35.5	0.025	2200						
3300	18×35.5	0.025	2200									

LZ


Low Impedance, Long Life Series



- Operating temperature range of -40 ~ +105°C
- Enabled high ripple current by a reduction of impedance at high frequency range
- High reliability withstanding 10000 hours load life at 105°C (6000 / 8000 hours for as specified below)
- Complied to the RoHS directive

MK → LZ
Long life


LZ



Item	Characteristics					
Operating temperature range	-40 ~ +105°C					
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes) $I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minute)					
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C					
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.					
	Rated Voltage(V)	6.3	10	16	25	35
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C			Z-25°C / Z+20°C		
		3			2	
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.					
	Leakage current	Less than specified value				
	Capacitance change	Within $\pm 25\%$ of initial value				
	$\tan\delta$	Less than 200% of specified value				
	$\varnothing D$	$\varnothing D = 5, 6.3$	$\varnothing D = 8$	$\varnothing D \geq 10$		
	Life time	6000 hours	8000 hours	10000 hours		
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4					

● DRAWING

Unit : mm

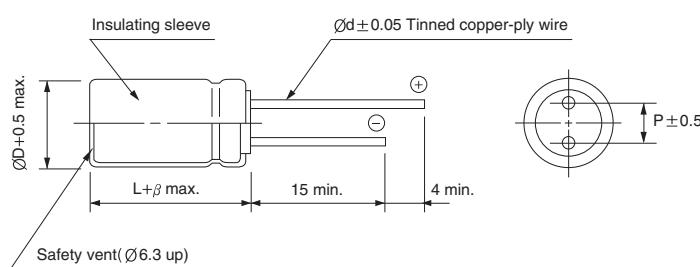

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β		1.5			2.0		

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
~ 33		0.32	0.60	0.80	0.90	1.00
47 ~ 270		0.40	0.63	0.82	0.91	1.00
330 ~ 680		0.45	0.67	0.84	0.92	1.00
820 ~ 1800		0.50	0.70	0.86	0.93	1.00
2200 ~		0.60	0.75	0.88	0.94	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LZ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
47	5 × 11	0.600	300	5 × 11	0.600	300	5 × 11	0.600	300
100	5 × 11	0.600	345	5 × 11	0.600	345	6.3 × 11	0.300	345
150	6.3 × 11	0.300	345	6.3 × 11	0.300	345	6.3 × 11	0.300	540
220	6.3 × 11	0.300	345	6.3 × 11	0.300	345	8 × 11.5	0.200	540
330	6.3 × 11	0.300	540	8 × 11.5	0.250	608	8 × 11.5	0.200	945
470	8 × 11.5	0.140	540	8 × 11.5	0.200	630	10 × 12.5	0.105	945
680	10 × 12.5	0.105	945	10 × 12.5	0.105	945	8 × 20	0.105	945
820	10 × 12.5	0.105	945	10 × 16	0.075	945	10 × 20	0.054	1760
1000	10 × 16	0.075	1250	8 × 20	0.105	945	8 × 20	0.075	1250
				10 × 12.5	0.105	945	10 × 20	0.054	1760
				10 × 16	0.075	1250	10 × 20	0.054	1760
				10 × 20	0.054	1650			
1200	10 × 16	0.075	1500	10 × 16	0.075	1760	10 × 20	0.054	1960
1500	10 × 20	0.054	1760	10 × 20	0.054	1760	12.5 × 20	0.050	1960
1800	10 × 20	0.054	1760	10 × 20	0.054	1760	12.5 × 20	0.050	2250
2200	12.5 × 20	0.050	1960	12.5 × 20	0.050	1960	12.5 × 25	0.040	2480
2700	12.5 × 20	0.050	2250	12.5 × 25	0.040	2250	12.5 × 25	0.040	2900
3300	12.5 × 20	0.050	2480	12.5 × 25	0.040	2480	16 × 25	0.030	3250
3900	12.5 × 25	0.040	2480	16 × 25	0.030	2480	16 × 25	0.030	3570
4700	16 × 25	0.030	3250	16 × 25	0.030	3250	16 × 31.5	0.027	3630
5600	16 × 25	0.030	3570	16 × 25	0.030	3570			
6800	16 × 25	0.030	3630	16 × 31.5	0.027	3630			
8200	16 × 31.5	0.027	3700	18 × 35.5	0.025	3700			

WV Item μF	25			35			50		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10							5 × 11	3.000	160
22							5 × 11	1.800	240
33							5 × 11	1.800	292
47				6.3 × 11	0.450	345	6.3 × 11	1.000	450
56				6.3 × 11	0.450	345	6.3 × 11	0.700	450
68	6.3 × 11	0.400	345	6.3 × 11	0.450	345	8 × 11.5	0.500	490
100	6.3 × 11	0.400	345	6.3 × 11	0.350	500	8 × 11.5	0.300	724
				8 × 11.5	0.300	540			
120	6.3 × 11	0.400	345	8 × 11.5	0.250	540	8 × 11.5	0.200	950
150	8 × 11.5	0.250	740	8 × 11.5	0.250	945	10 × 12.5	0.120	979
180	8 × 11.5	0.200	740	8 × 11.5	0.190	945	8 × 20	0.120	1200
220	8 × 11.5	0.180	740	8 × 11.5	0.190	945	8 × 20	0.120	1370
270	10 × 12.5	0.105	945	8 × 15	0.120	945	10 × 16	0.075	1370
				10 × 16	0.085	1250			
330	10 × 12.5	0.105	945	10 × 16	0.085	1330	10 × 20	0.064	1870
390	8 × 15	0.135	1250	10 × 20	0.054	1500	10 × 20	0.064	2050
	10 × 12.5	0.105	1250						
470	10 × 16	0.075	1330	8 × 20	0.095	1430	12.5 × 20	0.050	2050
				10 × 16	0.085	1600			
				10 × 20	0.054	1760			
560	8 × 20	0.075	1700	12.5 × 20	0.050	1960	12.5 × 25	0.040	2410
	10 × 20	0.054							
680	10 × 16	0.075		10 × 20	0.054	1850	12.5 × 25	0.040	2410
	10 × 20	0.054		12.5 × 20	0.050	2250			
				10 × 25					
820	10 × 20	0.054	2300	12.5 × 25	0.040	2350	16 × 20	0.040	2730
	12.5 × 20	0.050							
1000	12.5 × 20	0.050	2350	12.5 × 25	0.040	2480	16 × 25	0.036	3010
1200	12.5 × 20	0.050	2480	16 × 20	0.040	2900			
1500	16 × 20	0.040	2480	16 × 25	0.030	3250			
1800	16 × 20	0.040	2900	16 × 25	0.030	3570			
2200	12.5 × 30	0.040	2900	16 × 31.5	0.027	3630			
	16 × 25	0.030	3250						
2700	16 × 25	0.030	3570						
3300	16 × 31.5	0.027	3630						

ML

Ultra Low Impedance, Long Life
Series



Low Impedance




Miniaturized



Solvent Proof

MZ → **ML**
Long life




- Long Life compared with MZ series
- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstandng 10000 hours load life at 105°C (6000/8000 hours for as specified below)
- Complied to the RoHS directive

Item	Characteristics													
Operating temperature range	-40 ~ +105°C													
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)													
Capacitance tolerance	±20% at 120Hz, 20°C													
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.													
	WV	6.3	10	16	25	35	50	63	100					
	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08					
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C				Z-25°C / Z+20°C									
	3				2									
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.													
	Leakage current		Less than specified value											
	Capacitance change		Within ±25% of initial value											
	tanδ		Less than 200% of specified value											
	ØD	ØD = 5, 6.3		ØD = 8	ØD ≥ 10									
	Life time	6000 hours		8000 hours	10000 hours									
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4													

● DRAWING

Unit : mm

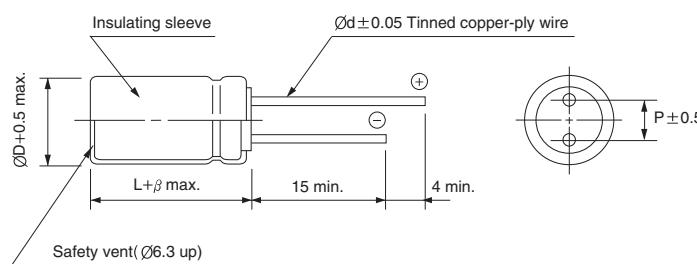

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
~ 33		0.42	0.70	0.90	0.95	1.00
47 ~ 220		0.50	0.73	0.92	0.96	1.00
330 ~ 680		0.55	0.77	0.94	0.97	1.00
1000 ~ 1500		0.60	0.80	0.96	0.98	1.00
2200 ~		0.70	0.85	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ML series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10							5×11	0.45	250	5×11	0.65	250
22	5×11	0.35	250	5×11	0.35	250	5×11	0.45	250	5×11	0.50	250
33	5×11	0.35	250	5×11	0.35	250	5×11	0.45	250	5×11	0.45	250
47	5×11	0.30	250	5×11	0.30	250	5×11	0.45	250	5×11	0.40	250
100	5×11	0.30	250	5×11	0.30	250	6.3×11	0.25	405	6.3×11	0.20	405
150	6.3×11	0.15	405	6.3×11	0.15	405	6.3×11	0.20	405	8×11.5	0.14	760
220	6.3×11	0.15	405	6.3×11	0.15	405	8×11.5	0.15	760	8×11.5	0.12	760
330	6.3×11	0.15	405	8×11.5	0.13	760	8×11.5	0.10	760	10×12.5	0.055	1030
390	6.3×11	0.15	405	8×11.5	0.11	760	8×11.5	0.10	760	8×15	0.072	1250
470	8×11.5	0.11	630	8×11.5	0.11	760	10×12.5	0.053	1030	10×12.5	0.055	1330
560	8×11.5	0.11	760	10×12.5	0.053	900	10×12.5	0.053	1100	8×20	0.072	1800
680	10×12.5	0.053	1030	10×12.5	0.053	1030	10×16	0.038	1430	10×16	0.040	1760
1000	10×12.5	0.053	1030	10×12.5	0.053	1330	10×16	0.038	1760	10×20	0.033	1960
1500	10×20	0.027	1820	10×20	0.030	1820	10×20	0.030	1960	12.5×20	0.029	2550
2200	12.5×20	0.025	2360	12.5×20	0.027	2360	12.5×25	0.023	2770	16×20	0.022	3250
3300	12.5×20	0.025	2360	12.5×20	0.027	2480	16×20	0.020	3250	16×25	0.018	3630
4700	16×25	0.015	3460	16×20	0.022	3250	16×25	0.018	3630			
6800	16×25	0.015	3460	16×25	0.018	3630						
10000	16×31.5	0.015	3680	18×31.5	0.015	3700						

WV Item μF	35			50			63			100			
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	
10	5×11	0.55	250	5×11	0.60	250	5×11	1.00	165	6.3×11	0.80	205	
22	5×11	0.50	250	5×11	0.45	250	6.3×11	0.53	265	8×11.5	0.45	355	
33	5×11	0.45	250	6.3×11	0.25	405	6.3×11	0.45	265	10×12.5	0.25	450	
47	6.3×11	0.30	405	6.3×11	0.20	405	8×11.5	0.20	500	10×12.5	0.20	580	
56	6.3×11	0.20	405	6.3×11	0.20	405	8×11.5	0.17	540	10×16	0.20	630	
68	8×11.5	0.10	540	8×11.5	0.15	540	10×12.5	0.15	760	10×16	0.20	700	
100	8×11.5	0.10	760	8×11.5	0.12	760	10×12.5	0.160	825	10×20	0.18	800	
										12.5×16	0.110	975	
150	8×11.5	0.10	760	10×12.5	0.061	1030	8×20	0.120		1200	12.5×20	0.090	1195
							10×20	0.080					
220	10×12.5	0.053	1030	10×16	0.038	1430	10×25	0.070	1300	16×25	0.060	1600	
330	10×12.5	0.053	1330	10×20	0.032	1820	12.5×20	0.050	1495	16×25	0.040	1750	
470	8×20	0.038	1600	12.5×20	0.030	2360	12.5×25	0.040	1990	18×31.5	0.035	2060	
	10×16	0.041	1760										
680	12.5×20	0.026	2360	12.5×25	0.022	2770	16×25	0.030	2780				
1000	12.5×20	0.026	2480	16×25	0.018	3460	16×35.5	0.020	2835				
1500	16×20	0.022	3250	16×31.5	0.015	3680							
2200	16×25	0.018	3630				18×40	0.02	3500				



**Low Imp., High Ripple Current
Series**




Low Impedance



Miniaturized



Solvent Proof




- For LED Lighting
- High reliability withstanding 10000 hours load life at 105°C (6000 ~ 9000 hours for smaller case sizes as specified below)
- Complied to the RoHS directive

Item	Characteristics									
Operating temperature range	-40 ~ +105°C									
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)									
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.									
	WV	6.3	10	16	25	35	50	63	80	100
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	Z-25°C / Z+20°C					2				
	Z-40°C / Z+20°C					3				
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.									
	Rated voltage (Vdc)			6.3 ~ 10			16 ~ 120			
	Capacitance change			Within $\pm 30\%$ of initial value			Within $\pm 25\%$ of initial value			
	$\tan\delta$			Less than 200% of specified value						
	Leakage current			Less than specified value						
	$\varnothing D$		Life time (hrs)							
	Ø5 ~ Ø6.3		6.3Vdc		10 ~ 50Vdc		63 ~ 120Vdc			
	$\varnothing 8 \times 11.5L$		8000		9000		8000			
	$\varnothing 8 \times 15L \sim 20L$		9000		10000		9000			
	$\varnothing 10 \times 12.5L$		9000		9000		9000			
	$\varnothing 10 \times 16L \sim 25L$		10000							
	$\varnothing 12.5 \sim$									
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4									

● DRAWING

Unit : mm

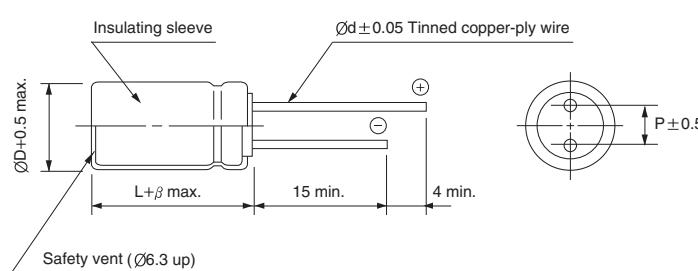

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 33		0.42	0.70	0.90	0.95	1.00
47 ~ 270		0.50	0.73	0.92	0.96	1.00
330 ~ 680		0.55	0.77	0.94	0.97	1.00
820 ~ 1800		0.60	0.80	0.96	0.98	1.00
2200 ~		0.70	0.85	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LQ series

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16			25			35		
	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
100										5 × 11	0.400	450			
120							5 × 11	0.400	450						
150				5 × 11	0.400	450				6.3 × 11	0.170	700			
180													8 × 11.5	0.075	1200
220	5 × 11	0.400	345										8 × 15	0.065	1600
270													10 × 12.5	0.053	1700
330				6.3 × 11	0.170	700				8 × 11.5	0.090	1200	8 × 20	0.041	1960
390										8 × 15	0.065	1600	10 × 16	0.038	2000
470	6.3 × 11	0.170	540							10 × 12.5	0.053	1700	10 × 16	0.038	2100
560				8 × 11.5	0.110	1200	8 × 15	0.059	1600	8 × 20	0.041	1960	10 × 20	0.030	2500
680				8 × 15	0.059	1600	10 × 12.5	0.053	1700	10 × 16	0.039	2000	10 × 25	0.027	2600
820	8 × 11.5	0.075	945	10 × 12.5	0.053	1700	8 × 20	0.041	1960				12.5 × 20	0.025	2900
1000	8 × 15	0.059	1250	10 × 16	0.041	1960	10 × 16	0.036	2000	10 × 20	0.030	2500	12.5 × 20	0.025	2900
1200	10 × 12.5	0.053	1500	10 × 16	0.036	2000				10 × 25	0.028	2900	12.5 × 25	0.022	3200
1500	8 × 20	0.041	1500				10 × 20	0.027	2500	12.5 × 20	0.026	2900	12.5 × 30	0.018	3660
1800	10 × 16	0.036	1760	10 × 20	0.027	2500	10 × 25	0.024	2600	12.5 × 25	0.024	3200	12.5 × 34.5	0.016	4120
2200				10 × 25	0.027	2900	12.5 × 20	0.023	2900	12.5 × 30	0.017	3660	16 × 20	0.021	3330
2700	10 × 20	0.027	1960	10 × 20	0.024	2600	12.5 × 25	0.018	3200	12.5 × 34.5	0.015	4120			
3300	10 × 25	0.023	2250	12.5 × 25	0.022	3200	12.5 × 30	0.017	3660	16 × 20	0.020	3300	16 × 25	0.016	3810
3900	12.5 × 20	0.024	2480				12.5 × 34.5	0.015	4120						
4700	12.5 × 25	0.018	2900	12.5 × 30	0.018	3660	16 × 25	0.016	3810						
5600	12.5 × 30	0.017	3450	16 × 25	0.016	3810									
6800	12.5 × 34.5	0.015	3570												
8200	16 × 20	0.020	3250												
	16 × 25	0.016	3630												

WV Item μF	50			63			80			100			120			
	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	
27	5 × 11	0.480	310				6.3 × 11	0.460	370				8 × 11.5	0.450	620	
33										8 × 15	0.350	780	8 × 20	0.160	1040	
47	6.3 × 11	0.380	400	6.3 × 11	0.350	420	8 × 11.5	0.290	620	10 × 12.5	0.250	780	10 × 16	0.110	1040	
56	6.3 × 11	0.220	500				8 × 15	0.200	780	10 × 12.5	0.250	780				
68							10 × 12.5	0.170	780	8 × 20	0.250	1040	10 × 20	0.084	1430	
82				8 × 11.5	0.240	720	8 × 20	0.160	1040	10 × 16	0.130	1140				
100	8 × 11.5	0.120	950	8 × 15	0.180	990	10 × 16	0.140	1040	10 × 20	0.105	1430	10 × 25	0.069	1620	
120	8 × 15	0.082	1230	10 × 12.5	0.110	990				12.5 × 16	0.105	1430	12.5 × 20	0.062	1750	
150	10 × 12.5	0.073	1280	8 × 20	0.096	1200	10 × 20	0.084	1430	10 × 25	0.075	1620	12.5 × 25	0.047	2210	
180	8 × 20	0.065	1580	10 × 16	0.076	1200	10 × 25	0.069	1620				12.5 × 30	0.042	2400	
220	10 × 16	0.050	1650				12.5 × 20	0.062	1750	12.5 × 20	0.070	1750	16 × 20	0.048	1950	
270				10 × 20	0.070	1570	12.5 × 25	0.047	2210	12.5 × 30	0.040	2400	16 × 20	0.032	2640	
330	10 × 20	0.036	2060	10 × 25	0.060	1990	12.5 × 30	0.042	2400	16 × 20	0.046	1950	18 × 25	0.036	2500	
390	10 × 25	0.030	2240	12.5 × 20	0.050	1990	12.5 × 34.5	0.036	2600	12.5 × 40	0.030	2860	16 × 35.5	0.029	2860	
										16 × 25	0.036	2430	18 × 31.5	0.030	2860	
										18 × 20	0.045	2270				
470	12.5 × 20	0.030	2300	12.5 × 25	0.039	2460	12.5 × 40	0.032	2860	16 × 31.5	0.030	2640		18 × 35.5	0.027	3510
560				12.5 × 30	0.035	2760	16 × 31.5	0.032	2640	16 × 35.5	0.028	2860	18 × 40	0.026	3860	
680	12.5 × 25	0.024	2800	12.5 × 34.5	0.024	3040	16 × 35.5	0.029	2860	18 × 31.5	0.029	2860				
820	12.5 × 30	0.022	3370	16 × 25	0.025	2890	18 × 25	0.036	2500	18 × 35.5	0.026	3510				
	16 × 20	0.025	3070				16 × 40	0.027	3510	18 × 40	0.025	3860				
1000	12.5 × 34.5	0.020	3810	16 × 31.5	0.023	2950	18 × 35.5	0.027	3510							
1200							18 × 40	0.026	3860							
2200				18 × 40	0.020	3200										

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Upgrade



Miniature, Long Life, For LED Lighting
Series

- Miniature, long life
- For LED Lighting
- High reliability withstanding 10000 hours load life at 105°C
- Complied to the RoHS directive




Long Life



Solvent Proof


WF → LY
Long life



Item	Characteristics							
Operating temperature range	-25 ~ +105°C							
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes) $I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minute)							
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C							
Dissipation factor max. (at 120Hz, 20°C)	WV	10	16	25	35	50	63	100
	$\tan\delta$	0.45	0.35	0.30	0.22	0.19	0.17	0.15
Low temperature characteristics (Impedance ratio at 120Hz)	WV	10	16	25	35	50	63	100
	Z-25°C/Z+20°C	8	6	4	4	3	4	4
Load life (after application of the rated voltage for 10000 hours at 105°C)	Leakage current	Less than specified value						
	Capacitance change	Within $\pm 25\%$ of the initial value						
	$\tan\delta$	Less than 200% of the specified value						
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4							

● DRAWING

Unit : mm

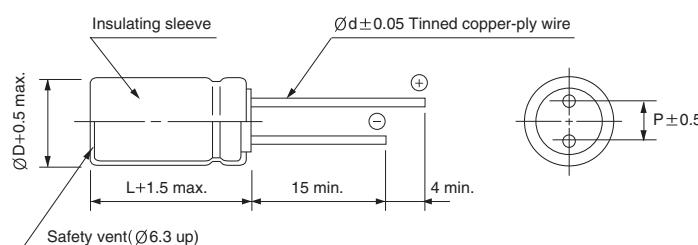

ØD	5	6.3	8
P	2.0	2.5	3.5
Ød	0.5	0.5	0.6

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency μF	120Hz	1kHz	10kHz	50kHz	100kHz
~ 33	0.42	0.70	0.90	0.95	1.00
47 ~	0.55	0.73	0.92	0.96	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LY series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10			16			25		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33							5 × 11	2.00	156
47				5 × 11	1.50	175	5 × 11	0.70	175
100	5 × 11	0.70	175	6.3 × 11	0.70	252	6.3 × 11	0.50	252
220	6.3 × 11	0.60	252	8 × 11.5	0.50	396	8 × 11.5	0.24	396
330	8 × 11.5	0.50	396	8 × 11.5	0.45	396			

WV Item μF	35			50			63		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
1.0				5 × 11	4.00	32			
2.2				5 × 11	3.00	42			
3.3				5 × 11	2.50	84			
4.7				5 × 11	2.50	96			
10				5 × 11	2.00	108			
22				5 × 11	1.60	132	6.3 × 11	1.60	265
33	5 × 11	0.70	175	6.3 × 11	1.60	228	6.3 × 11	1.60	265
47	6.3 × 11	0.60	252	6.3 × 11	0.80	228	8 × 11.5	0.35	270
100	8 × 11.5	0.40	396	8 × 11.5	0.50	324			
220	8 × 15	0.35	430						


WV Item μF	100		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
33	6.3 × 11	1.60	205
47	8 × 11.5	1.60	240
100	8 × 11.5	0.35	240

MH Low Imp., Long Life Series

Low Impedance Miniaturized Solvent Proof

- Long Life compared with ML series
- High reliability withstanding 12000 hours load life at 105°C (7000/9000 hours for as specified below)
- Complied to the RoHS directive


ML → MH
Long life



Item	Characteristics										
Operating temperature range	-40 ~ +105°C										
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes) $I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minute)										
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.										
	WV	6.3	10	16	25	35	50				
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12	0.10				
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C			Z-25°C / Z+20°C							
	3			2							
Load life	After an application of DC bias voltage plus the rated AC ripple current for 12000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.										
	Leakage current	Less than specified value									
	Capacitance change	Within $\pm 25\%$ of initial value									
	$\tan\delta$	Less than 200% of specified value									
	$\varnothing D$	$\varnothing D = 5, 6.3$		$\varnothing D = 8$	$\varnothing D \geq 10$						
	Life time	7000 hours		9000 hours	12000 hours						
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4										

DRAWING

Unit : mm

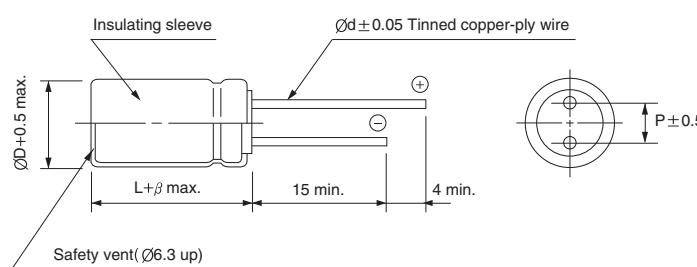

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5		2.0				

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 33		0.42	0.70	0.90	0.95	1.00
47 ~ 220		0.50	0.73	0.92	0.96	1.00
330 ~ 680		0.55	0.77	0.94	0.97	1.00
1000 ~ 1500		0.60	0.80	0.96	0.98	1.00
2200 ~		0.70	0.85	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

MH series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10							5 × 11	0.35	250
22	5 × 11	0.35	250	5 × 11	0.35	250	5 × 11	0.35	250
33	5 × 11	0.35	250	5 × 11	0.35	250	5 × 11	0.35	250
47	5 × 11	0.30	250	5 × 11	0.30	250	5 × 11	0.30	250
100	5 × 11	0.30	250	5 × 11	0.30	250	6.3 × 11	0.25	405
150	6.3 × 11	0.15	405	6.3 × 11	0.15	405	6.3 × 11	0.20	405
220	6.3 × 11	0.15	405	6.3 × 11	0.15	405	8 × 11.5	0.15	760
330	6.3 × 11	0.15	405	8 × 11.5	0.13	760	8 × 11.5	0.10	760
390	6.3 × 11	0.15	405	8 × 11.5	0.11	760	8 × 11.5	0.10	760
470	8 × 11.5	0.11	630	8 × 11.5	0.11	760	10 × 12.5	0.053	1030
560	8 × 11.5	0.11	760	10 × 12.5	0.053	760	10 × 12.5	0.053	1100
680	10 × 12.5	0.053	1030	10 × 12.5	0.053	1030	10 × 16	0.038	1430
1000	10 × 12.5	0.053	1030	10 × 12.5	0.053	1330	10 × 16	0.038	1760
1500	10 × 20	0.027	1820	10 × 20	0.030	1820	10 × 20	0.030	1960
2200	12.5 × 20	0.025	2360	12.5 × 20	0.027	2360	12.5 × 25	0.023	2770
3300	12.5 × 20	0.025	2360	12.5 × 20	0.027	2480	16 × 20	0.020	3250
4700	16 × 25	0.015	3460	16 × 25	0.022	3250	16 × 25	0.018	3630
6800	16 × 25	0.015	3460	16 × 25	0.018	3630			
10000	16 × 31.5	0.015	3680	18 × 31.5	0.015	3700			


WV Item μF	25			35			50		
	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz	$\varnothing D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 105°C 100kHz
10	5 × 11	0.35	250	5 × 11	0.55	250	5 × 11	0.60	250
22	5 × 11	0.35	250	5 × 11	0.50	250	5 × 11	0.45	250
33	5 × 11	0.35	250	5 × 11	0.45	250	6.3 × 11	0.25	405
47	5 × 11	0.30	250	6.3 × 11	0.30	405	6.3 × 11	0.20	405
56	6.3 × 11	0.27	405	6.3 × 11	0.20	405	6.3 × 11	0.20	405
68	6.3 × 11	0.27	405	8 × 11.5	0.10	540	8 × 11.5	0.15	540
100	6.3 × 11	0.20	405	8 × 11.5	0.10	760	8 × 11.5	0.12	760
150	8 × 11.5	0.14	760	8 × 11.5	0.10	760	10 × 12.5	0.061	1030
220	8 × 11.5	0.12	760	10 × 12.5	0.053	1030	10 × 16	0.038	1430
330	10 × 12.5	0.053	1030	10 × 12.5	0.053	1330	10 × 20	0.032	1820
390	10 × 12.5	0.053	1250	10 × 16	0.048	1550	12.5 × 20	0.031	2000
470	10 × 12.5	0.050	1330	10 × 16	0.041	1760	12.5 × 20	0.030	2360
560	10 × 16	0.050	1800	10 × 20	0.037	2100	12.5 × 25	0.027	2450
680	10 × 16	0.040	1760	12.5 × 20	0.026	2360	12.5 × 25	0.022	2770
1000	10 × 20	0.033	1960	12.5 × 20	0.026	2480	16 × 25	0.018	3460
1500	12.5 × 20	0.029	2550	16 × 20	0.022	3250	16 × 31.5	0.015	3680
2200	16 × 20	0.022	3250	16 × 25	0.018	3630			
3300	16 × 25	0.018	3630						

QY

Long Life Series




- High reliability withstanding 13000 hours load life at 105°C
- Complied to the RoHS directive, Halogen-Free



Item	Characteristics		
Operating temperature range	-25 ~ +105°C		
Leakage current max.	$I = 0.01CV$ or $3\mu A$ (after 2 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max. (at 120Hz, 20°C)	WV	35	50
	$\tan\delta$	0.22	0.19
Low temperature characteristics (Impedance ratio at 120Hz)	WV	35	50
	$Z-25^\circ C/Z+20^\circ C$	3	3
Load life (after application of the rated voltage for 13000 hours at 105°C)	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 30\%$ of initial value	
	$\tan\delta$	Less than 300% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING

Unit : mm

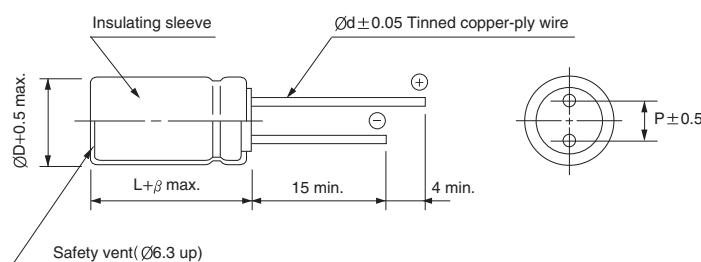

ØD	6.3	8	10	12.5
P	2.5	3.5	5.0	5.0
Ød	0.5	0.5	0.6	0.6
β	1.5		2.0	

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	35		50			
		22	47	6.3 × 11	205	6.3 × 11	228
100	8 × 11.5			550		10 × 16	700
220	10 × 16			800		12.5 × 20	990
330	10 × 20			1030		12.5 × 25	1250
470	12.5 × 20			1320		12.5 × 30	1585
560	12.5 × 25			1500			

↑ Ripple current (mA rms) at 105°C, 100kHz
Case size $\text{ØD} \times \text{L}$ (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
~ 22		0.25	0.50	0.75	0.90	1.00
47 ~		0.30	0.55	0.80	0.90	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

MG Long Life Series

- Long Life
- For LED Lighting
- High reliability withstanding 20000 hours load life at 105°C
- Complied to the RoHS directive


MH → MG
Long life



Item	Characteristics				
Operating temperature range	-40 ~ +105°C				
Leakage current max.	$I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minutes)				
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C				
Dissipation factor max. (at 120Hz, 20°C)	WV	10	16	25	35
	$\tan\delta$	0.20	0.16	0.14	0.12
Low temperature characteristics (Impedance ratio at 120Hz)	WV	10	16	25	35
	Z-25°C/Z+20°C	3	2	2	2
	Z-40°C/Z+20°C	3	3	3	3
Load life (after application of the rated voltage for 20000 hours at 105°C)	Leakage current	Less than specified value			
	Capacitance change	Within $\pm 30\%$ of initial value			
	$\tan\delta$	Less than 300% of specified value			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4				

DRAWING

Unit : mm

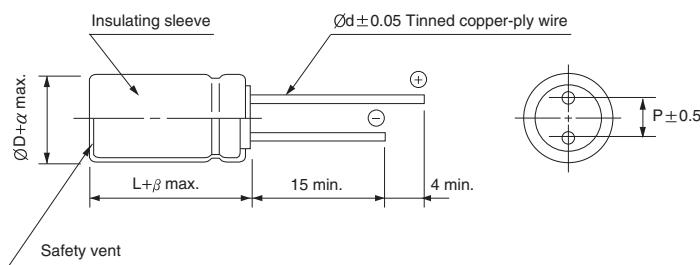

ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
α	0.5			
β	2.0			

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

$\mu F \setminus WV$	10	16	25	35
100			10 × 12.5	420
220		10 × 12.5	10 × 12.5	840
330	10 × 12.5	10 × 16	10 × 16	1008
470	10 × 12.5	10 × 20	10 × 20	1344
680	10 × 16	12.5 × 20	12.5 × 20	1680
1000	10 × 20	12.5 × 25	12.5 × 25	1879
2200	12.5 × 25	16 × 25	16 × 25	2184
3300	16 × 25	16 × 31.5	16 × 31.5	
4700	16 × 31.5	2184		


Ripple current (mA rms) at 105°C, 100kHz
Case size ØD×L (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
Coefficient	0.75	0.8	0.9	0.95	1.00

KS For PSU, Long Life Series


- High reliability withstanding 8000 hours load life at 85°C
- Suitable for CFL, adapter and power supply
- Complied to the RoHS directive



Item	Characteristics			
Operating temperature range	-25 ~ +85°C			
Leakage current max.	I = 0.02CV+25μA (after 5 minutes)			
Capacitance tolerance	±20% at 120Hz, 20°C			
Dissipation factor max. (at 120Hz, 20°C)	Rated Voltage(V)	420	450	500
	tanδ	0.2	0.2	0.2
Low temperature characteristics (Impedance ratio at 120Hz)	WV	420	450	500
	Z(-25°C) / Z(+20°C)	6	6	6
Load life (after application of the rated voltage for 8000 hours at 85°C)	Leakage current	Less than specified value		
	Capacitance change	Within ±20% of initial value		
	tanδ	Less than 200% of specified value		
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4			

● DRAWING

Unit : mm

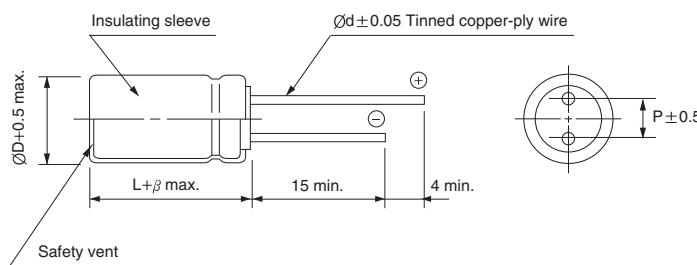

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	420		450		500	
47					16 × 35.5	474
56					16 × 40	552
68	16 × 31.5	726	16 × 35.5	738	16 × 40	648
			18 × 31.5	738	16 × 45	
					18 × 40	
82	16 × 40	768	16 × 40	834	16 × 40	684
			18 × 31.5	834		
100	16 × 40	960	16 × 45	990	16 × 50	924
			18 × 35.5	990		
120	16 × 45	1122	16 × 50	1056	20 × 41	1035
150			18 × 45	1146		

↑ ↑
Ripple current (mA rms) at 85°C, 120Hz
Case size ØD×L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


WV	Frequency	120Hz	1kHz	10kHz	50kHz, 100kHz
420 ~ 500V		1.00	1.40	1.50	2.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

SB High Ripple Current, Long Life Series




- High reliability withstanding 10000 hours load life at 85°C
- Suitable for CFL, adapter and power supply
- Complied to the RoHS directive



Item	Characteristics			
Operating temperature range	-25 ~ +85°C			
Leakage current max.	$I = 0.02CV + 25\mu A$ (after 5 minutes)			
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C			
Dissipation factor max. (at 120Hz, 20°C)	Rated Voltage(V)	420	450	500
	$\tan\delta$	0.20	0.20	0.20
Low temperature characteristics (Impedance ratio at 120Hz)	WV	420	450	500
	$Z(-25^\circ C) / Z(+20^\circ C)$	6	6	6
Load life (after application of the rated voltage for 10000 hours at 85°C)	Leakage current	Less than specified value		
	Capacitance change	Within $\pm 20\%$ of initial value		
	$\tan\delta$	Less than 200% of specified value		
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4			

DRAWING

Unit : mm

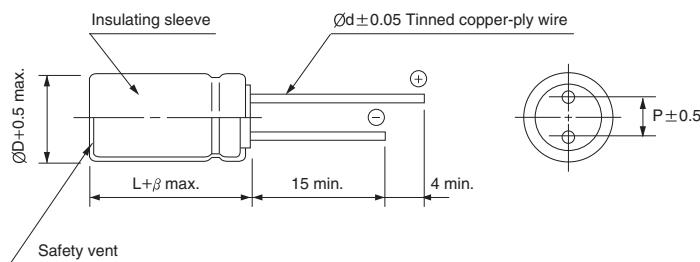

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	420		450		500	
47						16 × 35.5	430
56						16 × 40	500
68	16 × 31.5	660	16 × 35.5	760	16 × 45	590	
			18 × 31.5		18 × 40		
82	16 × 31.5	700	16 × 40	900	16 × 50	620	
			18 × 31.5				
100	16 × 40	870	16 × 40	920	16 × 50	900	
			18 × 35.5				
120	16 × 45	1020	16 × 50	960			
150			16 × 50	1040			

Ripple current (mA rms) at 85°C, 120Hz
Case size ØD × L (mm)

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


WV	Frequency	120Hz	1kHz	10kHz	50kHz, 100kHz
420 ~ 500V		1.00	1.40	1.50	2.00

KA

For PSU, High Ripple Current
Series

- High ripple current
- Operating temperature range of -40 ~ +105°C
- Complied to the RoHS directive


WL → KA
Long Life



Item	Characteristics		
Operating temperature range	WV	400 ~ 450	500
	Temperature range	-40 ~ +105°C	-25 ~ +105°C
Leakage current max.	$I = 0.02CV + 15\mu A$ (after 5 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max.	0.2max. at 120Hz, 20°C		
Low temperature characteristics (Impedance ratio at 120Hz)	WV	400 ~ 450	500
	Z-25°C/Z+20°C	6	8
	Z-40°C/Z+20°C	10	-
Load life	After an application of DC bias voltage plus the rated AC ripple current for 3000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.		
	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 20\%$ of initial value	
	$\tan\delta$	Less than 200% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING

Unit : mm

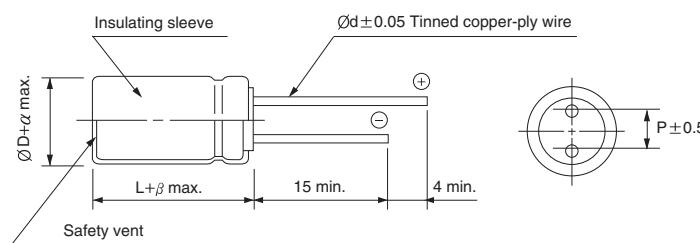

ØD	10	12.5	16	18	20
P	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.8	0.8	0.8
α		0.5		1.0	
β		2.0		3.0	

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
	~ 33	0.40	0.65	0.82	0.91	1.00
	47 ~ 150	0.50	0.70	0.84	0.92	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

KA series



● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	400		420		450		500	
	$\varnothing\text{D} \times \text{L(mm)}$	Ripple current (mA rms) 105°C, 100kHz	$\varnothing\text{D} \times \text{L(mm)}$	Ripple current (mA rms) 105°C, 100kHz	$\varnothing\text{D} \times \text{L(mm)}$	Ripple current (mA rms) 105°C, 100kHz	$\varnothing\text{D} \times \text{L(mm)}$	Ripple current (mA rms) 105°C, 100kHz
3.3					10×20	150		
4.7					10×20	200		
10	10×16	176			10×20	230	12.5×20	240
	10×20	180						
22	12.5×25	300			12.5×25	525	12.5×30	420
							16×25	470
33	16×20	600			16×25	600	18×25	580
47	16×25	700	16×25	630	16×25	660	16×35.5	650
					16×31.5	720	18×31.5	650
					18×25	720	18×35.5	700
56			16×31.5	740	16×31.5	800	16×40	740
					18×25	800		
68	16×31.5	1100	16×31.5	810	16×31.5	900	16×45	820
							18×40	900
82	16×35.5	1150	16×40	960	16×40	1115	16×50	1000
			18×31.5	960	18×31.5	1115	18×40	1000
100	18×35.5	1200	16×40	1100	16×40	1200	16×50	1250
			18×35.5	1100	18×35.5	1200	18×45	1250
							20×41	1250
120	18×40	1270	16×50	1250	16×50	1500	20×41	1370
			18×40	1250	18×40	1500		
150	20×41	1380			20×41	1600		

RH

For PSU High Ripple Current, Long Life Series


- High ripple current
- High reliability withstanding 5000 hours load life at 105°C
- Suited for ballast application
- Complied to the RoHS directive



Item	Characteristics														
Operating temperature range	WV			160 ~ 450			500								
	Temperature range			-40 ~ +105°C			-25 ~ +105°C								
Leakage current max.	$I = 0.02CV + 15\mu A$ (after 5 minutes)														
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C														
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500						
	$\tan\delta$	0.15	0.15	0.15	0.20	0.24	0.24	0.24	0.24						
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	450	500							
	Z-25°C/Z+20°C	3	3	3	4	6	6	6							
	Z-40°C/Z+20°C	4	4	4	8	10	10	-							
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.														
	Leakage current		Less than specified value												
	Capacitance change		Within $\pm 20\%$ of initial value												
	$\tan\delta$		Less than 200% of specified value												
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4														

● DRAWING

Unit : mm

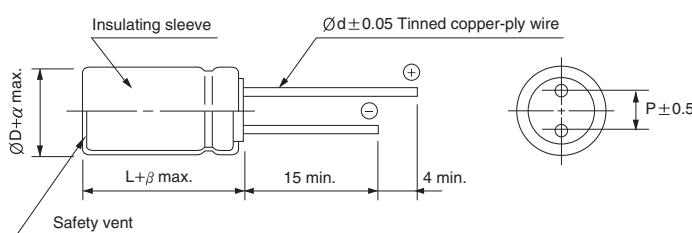

$\varnothing D$	10	12.5	16	18	20	22
P	5.0	5.0	7.5	7.5	10.0	10.0
$\varnothing d$	0.6	0.6	0.8	0.8	0.8	1.0
α	0.5				1.0	
β	2.0				3.0	

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 4.7		0.25	0.30	0.60	0.80	0.90	1.00
6.8 ~ 15		0.30	0.40	0.70	0.90	0.95	1.00
22 ~		0.40	0.50	0.80	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RH series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT



μF	WV	160		200		250		350	
4.7								10 × 16	200
6.8				10 × 12.5	120	10 × 12.5	120	10 × 16	200
10	10 × 16	250	10 × 16	300	10 × 20	300	10 × 20	280	
15					10 × 12.5	260			
22	10 × 16	360	10 × 16	360	12.5 × 20	600	12.5 × 20	350	
	10 × 20	500	10 × 20	500					
33	10 × 20	500	10 × 20	500	12.5 × 20	600	16 × 20	500	
			12.5 × 20	600					
47	12.5 × 20	600	12.5 × 20	660	12.5 × 25	720	16 × 25	660	
68	12.5 × 25	600	12.5 × 25	760	16 × 25	920	16 × 31.5	800	
82	16 × 20	760	16 × 20	880	16 × 25	1120	18 × 31.5	920	
100	16 × 25	1100	16 × 25	1120	16 × 31.5	1200	18 × 31.5	1020	
120	16 × 25	1180	16 × 31.5	1200	18 × 25	1200	18 × 31.5	1150	
150	16 × 31.5	1300	16 × 31.5	1300	18 × 25	1250	18 × 40	1250	
					18 × 31.5	1250			
220					18 × 35.5	1600			

μF	WV	400		420		450		500	
1.0		10 × 12.5	90						
2.2		10 × 12.5	100	10 × 12.5	100	10 × 12.5	100		
3.3		10 × 12.5	128	10 × 12.5	128	10 × 12.5	128		
4.7		10 × 12.5	180	10 × 12.5	180	10 × 16	180		
6.8		10 × 16	200	10 × 16	200	10 × 16	200		
10	10 × 20	280	10 × 20	280	10 × 20	300	12.5 × 20	300	
							12.5 × 25	360	
15	12.5 × 16	280					12.5 × 25	360	
22	12.5 × 25	430	12.5 × 25	430	12.5 × 20	430	16 × 25	420	
					16 × 25	550			
33	16 × 25	640	16 × 25	660	16 × 31.5	700	16 × 31.5	560	
47	16 × 31.5	750	16 × 31.5	750	16 × 31.5	700	18 × 35.5	700	
56			18 × 25	750	18 × 25	750	18 × 35.5	740	
68	16 × 31.5	880	16 × 31.5	900	18 × 25	900	18 × 35.5	900	
					18 × 31.5	1000			
82	16 × 35.5	1000	16 × 35.5	1000	18 × 31.5	1035	18 × 40	1030	
					18 × 35.5	1100			
100	18 × 35.5	1120	18 × 35.5	1170	18 × 35.5	1500	18 × 45	1100	
120	18 × 40	1250	18 × 40	1280	18 × 40	1500	20 × 41	1200	
150	20 × 41	1380	20 × 41	1500	20 × 41	1796			
180	20 × 41	1450	20 × 41	1600	22 × 45	1800			

↑ Ripple current (mA rms) at 105°C, 100kHz
↑ Case size ØD×L (mm)

BHFor PSU, High Ripple Current
Series

- Higher ripple current compared with RH series
- Operating temperature range of -25 ~ +105°C
- High reliability withstanding 5000 hours load life at 105°C
- Complied to the RoHS directive



Item	Characteristics						
Operating temperature range	-40 ~ +105°C						
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minute) $I = 0.02CV + 25\mu A$ (after 5 minutes)						
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C						
Dissipation factor max. (at 120Hz, 20°C)	WV	200	250	350	400	450	500
	$\tan\delta$	0.15	0.15	0.20	0.24	0.24	0.24
Low temperature characteristics (Impedance ratio at 120Hz)	WV	200	250	350	400	450	500
	Z-25°C/Z+20°C	3	3	3	3	3	3
	Z-40°C/Z+20°C	11	11	11	11	11	11
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.						
	Leakage current		Less than specified value				
	Capacitance change		Within $\pm 20\%$ of initial value				
	$\tan\delta$		Less than 200% of specified value				
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4						

● DRAWING (See page 85)

Unit : mm

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	200		250		350		400	
		2.2	3.3	4.7	6.8	8.2	10	22	33
2.2									
3.3							10 × 12.5	140	10 × 12.5
4.7							10 × 16	220	10 × 16
6.8							10 × 16	280	10 × 16
8.2							8 × 20	300	8 × 20
10	10 × 16	320	10 × 16	320		8 × 20	300	8 × 23	400
						10 × 20	400	10 × 20	400
22	8 × 20	300	8 × 23	350	10 × 30	500	12.5 × 20	700	
	10 × 20	550	10 × 20	550	12.5 × 20	650	12.5 × 25	780	
33	12.5 × 20	700	12.5 × 20	800	12.5 × 25	680	16 × 25	910	16 × 25
47	12.5 × 20	980	12.5 × 25	1040	12.5 × 30	1050	18 × 20	1150	
68	12.5 × 20	1100	12.5 × 30	1300	16 × 31.5	1300			
	12.5 × 25	1300	16 × 25	1350					
82	16 × 20	1450	12.5 × 30	1450					
100	12.5 × 30	1550							
	16 × 25	1630							

Ripple current (mA rms) at 105°C, 100kHz

Case size ØD×L (mm)

WV	Cap.(μF)	$\emptyset D \times L$ (mm)	Rated ripple current (mA rms)105°C				
			120Hz	1kHz	10kHz	50kHz	100kHz \leq
450	8.2	8×20	160	280	360	380	400
	4.7	8×20	70	120	160	216	240
500	5.6	8×20	120	210	270	285	300

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 4.7		0.40	0.60	0.80	0.90	1.00
6.8 ~ 10		0.40	0.70	0.90	0.95	1.00
22 ~		0.50	0.80	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

KU For PSU, High Ripple Current, Long Life Series

- High ripple current
- High reliability withstanding 5000 hours load life at 105°C
- Suited for ballast application
- Complied to the RoHS directive

RH → KU
High Ripple



Item	Characteristics		
Operating temperature range	WV	400 ~ 450	500
	Temperature range	-40 ~ +105°C	-25 ~ +105°C
Leakage current max.	$I = 0.02CV + 15\mu A$ (after 5 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max.	0.24max. at 120Hz, 20°C		
Low temperature characteristics (Impedance ratio at 120Hz)	WV	400 ~ 450	500
	Z-25°C/Z+20°C	6	6
	Z-40°C/Z+20°C	10	-
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.		
	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 20\%$ of initial value	
	$\tan\delta$	Less than 200% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING (See page 85)

Unit : mm

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	400		420		450		500	
	$\varnothing D \times L$ (mm) 105°C, 100kHz	Ripple current (mA rms) 105°C, 100kHz	$\varnothing D \times L$ (mm) 105°C, 100kHz	Ripple current (mA rms) 105°C, 100kHz	$\varnothing D \times L$ (mm) 105°C, 100kHz	Ripple current (mA rms) 105°C, 100kHz	$\varnothing D \times L$ (mm) 105°C, 100kHz	Ripple current (mA rms) 105°C, 100kHz
1.0	10×12.5	108						
2.2	10×12.5	120	10×12.5	120	10×12.5	120		
3.3	10×12.5	154	10×12.5	154	10×12.5	154		
4.7	10×16	216	10×16	216	10×20	216		
6.8	10×16	240	10×16	240	10×20	240		
10	10×20	336	10×20	336	12.5×20	360	12.5×20	360
15	12.5×16	336					12.5×25	432
22	12.5×25	516	12.5×25	516	12.5×25	516	16×25	504
33	16×25	768	16×25	792	16×25	768	16×31.5	672
47	16×31.5	900	16×31.5	900	16×31.5	840	18×35.5	840
56			18×25	900	18×25	900	18×35.5	888
68	16×31.5	1056	16×31.5	1080	16×35.5	1200	16×45	1080
82	16×35.5	1200	16×40	1260	16×35.5	1242	16×45	1236
100	18×35.5	1344	16×45	1440	16×45	1450	16×50	1320
120	18×40	1500	18×40	1536	16×50	1620	20×41	1570
150	20×41	1656	20×41	1800				

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT


μF	Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 4.7		0.25	0.30	0.60	0.80	0.90	1.00
6.8 ~ 15		0.30	0.40	0.70	0.90	0.95	1.00
22 ~ 150		0.40	0.50	0.80	0.90	0.95	1.00

BL For PSU, High Ripple Current, Long Life Series

- High ripple current
- Operating temperature range of -40 ~ +105°C
- For power supply and adapter
- Complied to the RoHS directive




RH → BL
Long life



Item	Characteristics									
Operating temperature range	-40 ~ +105°C (160 ~ 450WV), -25 ~ +105°C (500WV)									
Leakage current max.	$I = 0.02CV + 25\mu A$ (after 5 minutes)									
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500	
	$\tan\delta$	0.15	0.15	0.15	0.20	0.20	0.20	0.20	0.24	
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	420	450	500	
	Z-25°C/Z+20°C	3	3	3	4	6	6	6	6	
	Z-40°C/Z+20°C	4	4	4	6	6	6	6	-	
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.									
	Leakage current		Less than specified value							
	Capacitance change		Within $\pm 20\%$ of initial value							
	$\tan\delta$		Less than 200% of specified value							
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4									

● DRAWING

Unit : mm

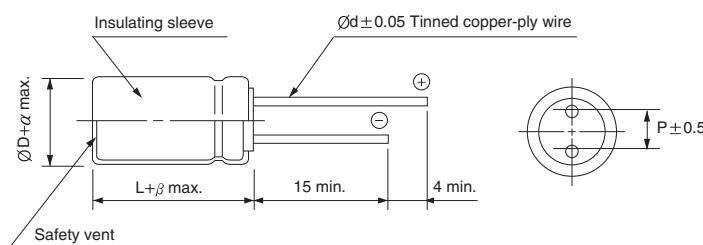

ØD	8	10	12.5	16	18	20
P	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.6	0.8	0.8	0.8
α				0.5		1.0
β	1.5			2.0		3.0

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
Coefficient	0.35	0.50	0.80	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

BL series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


μF	WV	160		200		250		350	
4.7						8 × 11.5	193		
6.8						8 × 11.5	220	10 × 16	264
						10 × 12.5	230		
10	10 × 16	320	10 × 16	320	10 × 16	320	8 × 20	315	
							10 × 20	340	
22	10 × 16	500	10 × 16	500	10 × 20	500	12.5 × 20	424	
33	10 × 20	650	10 × 20	650	12.5 × 20	770	16 × 20	605	
47	10 × 20	750	12.5 × 20	840	12.5 × 20	980	16 × 25	800	
68	12.5 × 20	970	12.5 × 25	970	16 × 20	1080	18 × 25	1020	
82	12.5 × 25	1250	16 × 20	1125			18 × 31.5	1090	
					16 × 20	1190			
100	12.5 × 25	1250	16 × 20	1230	18 × 25	1425			
150	16 × 25	1610	18 × 25	1740	18 × 25	2000			

μF	WV	400		420		450		500	
1		8 × 11.5	72			8 × 11.5	100		
2.2		8 × 11.5	99			8 × 11.5	110		
3.3		8 × 11.5	160			8 × 11.5	160		
3.9		8 × 11.5	170			8 × 15	180		
4.7	8 × 15	175				8 × 20	240		
	10 × 12.5	230				10 × 16	240		
6.8	8 × 20	230				10 × 16	265		
	10 × 16	265							
10	10 × 20	340	10 × 20	360	10 × 20	385	12.5 × 25	385	
15					10 × 20	385			
22	12.5 × 25	520	12.5 × 25	520	12.5 × 20	485	16 × 25	675	
			16 × 20	520	12.5 × 25	485	16 × 31.5	820	
					16 × 25	675			
33	16 × 25	775	16 × 25	825	18 × 25	845	18 × 35.5	870	
47	18 × 25	1020	18 × 31.5	1015	18 × 31.5	1060	18 × 35.5	1000	
68	18 × 31.5	1050	18 × 25	1090	18 × 25	1200	18 × 35.5	1200	
			18 × 31.5	1125	18 × 31.5	1200	18 × 40	1300	
82	18 × 35.5	1150	18 × 31.5	1210	18 × 35.5	1270	16 × 50	1350	
100	18 × 40	1210	18 × 35.5	1270	18 × 35.5	1330			
			18 × 40	1330	18 × 40	1400			
120					18 × 40	1450			
150					20 × 41	1550			

↑ Ripple current (mA rms) at 105°C, 100kHz
Case size ØD×L (mm)

MT For Display, 12000 hours at 105°C Series


- High reliability withstanding 12000 Hours load life at 105°C
- For power supply and adapter
- Complied to the RoHS directive



Item	Characteristics								
Operating temperature range	-40 ~ +105°C								
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minutes) $I = 0.02CV + 25\mu A$ (after 5 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500
	$\tan\delta$	0.20		0.24					
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	420	450	500
	Z-25°C/Z+20°C	3	3	3	3	6	6	6	6
	Z-40°C/Z+20°C	4	4	4	6	6	6	6	6
Load life	After an application of DC bias voltage plus the rated AC ripple current for 12000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 20\%$ of initial value							
	$\tan\delta$	Less than 200% of specified value							
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

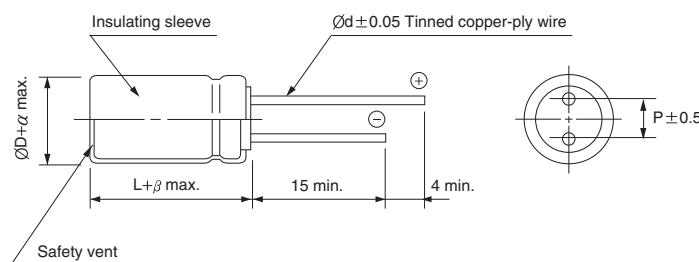

ØD	10	12.5	16	18	20
P	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.8	0.8	0.8
α		0.5		1.0	
β		2.0		3.0	

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
10 ~ 82		1.00	1.75	2.25	2.45	2.50
100 ~ 470		1.00	1.67	2.05	2.20	2.25

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

MT series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


μF	WV	160		200		250		350	
10		10 × 16	102	10 × 16	110	10 × 12.5	110	10 × 16	135
22		10 × 16	195	10 × 16	200	10 × 16	195	12.5 × 20	270
27		10 × 16	222	10 × 16	222	10 × 20	240	12.5 × 20	285
33		10 × 16	245	10 × 20	280	12.5 × 20	294	12.5 × 25	290
39		10 × 16	265	10 × 20	305	12.5 × 20	322	12.5 × 25	320
47		10 × 20	335	10 × 20	335	12.5 × 20	400	16 × 25	410
68		12.5 × 20	400	12.5 × 20	447	12.5 × 25	540	16 × 25	550
82		12.5 × 20	450	12.5 × 25	560	16 × 20	600	18 × 25	625
100		12.5 × 25	525	16 × 25	652	16 × 25	652	18 × 31.5	743
120		16 × 20	525	16 × 25	714	18 × 20	652	18 × 35.5	840
150		12.5 × 25	580	16 × 25	760	18 × 25	820	18 × 35.5	942
180		16 × 25	810	16 × 31.5	850	18 × 31.5	920		
220		16 × 31.5	880	18 × 31.5	1000	18 × 31.5	1000		
270		18 × 25	880	18 × 35.5	1150				
330		16 × 40	1142	18 × 40	1250				
470		18 × 40	1401						

μF	WV	400		420		450		500	
10		10 × 16	135	10 × 20	135	10 × 20	135	12.5 × 20	165
22		12.5 × 20	270	12.5 × 20	225	12.5 × 25	296	16 × 20	260
27		12.5 × 25	285	12.5 × 20	254	12.5 × 25	305	16 × 25	329
33		12.5 × 25	320	16 × 20	345	16 × 20	364	16 × 25	350
39		12.5 × 30	320	16 × 25	345	16 × 25	400	16 × 31.5	413
47		16 × 25	420	16 × 25	450	16 × 25	450	16 × 35.5	462
68		18 × 20	436	18 × 20	450	18 × 20	450	18 × 31.5	468
82		16 × 31.5	540	18 × 25	520	18 × 25	560	16 × 45	630
100		18 × 25	540	18 × 31.5	580	18 × 31.5	590	18 × 35.5	600
120		18 × 31.5	700	18 × 31.5	650	16 × 40	650	16 × 50	685
150		18 × 35.5	743	16 × 45	770	16 × 45	770	18 × 45	800
180		18 × 35.5	820	18 × 35.5	770	18 × 35.5	790	20 × 41	800
220		18 × 40	840	16 × 50	850	16 × 50	850	18 × 50	920
270		18 × 40	912	18 × 40	850	18 × 40	850		
330		18 × 40	1020	18 × 45	1000				
470		20 × 41	1080						

↑ Ripple current (mA rms) at 105°C, 120Hz
↑ Case size ØD×L (mm)

KJ For PSU, High Ripple, Long Life Series


- High reliability withstanding 12000 hours load life at 105°C
- Suitable for CFL, adapter and power supply
- Complied to the RoHS directive



Item	Characteristics																																			
Operating temperature range	$-40 \sim +105^\circ\text{C}$ (160 ~ 450WV), $-25 \sim +105^\circ\text{C}$ (500WV)																																			
Leakage current max.	$I = 0.04\text{CV} + 100\mu\text{A}$ (after 1 minute) $I = 0.02\text{CV} + 25\mu\text{A}$ (after 5 minutes)																																			
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C																																			
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>420</td><td>450</td><td>500</td></tr> <tr> <td>$\tan\delta$</td><td>0.15</td><td>0.15</td><td>0.15</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.24</td></tr> </table>									WV	160	200	250	350	400	420	450	500	$\tan\delta$	0.15	0.15	0.15	0.20	0.20	0.20	0.20	0.24									
WV	160	200	250	350	400	420	450	500																												
$\tan\delta$	0.15	0.15	0.15	0.20	0.20	0.20	0.20	0.24																												
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>420</td><td>450</td><td>500</td></tr> <tr> <td>Z-25°C/Z+20°C</td><td>3</td><td>3</td><td>3</td><td>6</td><td>6</td><td>6</td><td>6</td><td>6</td></tr> <tr> <td>Z-40°C/Z+20°C</td><td>4</td><td>4</td><td>4</td><td>10</td><td>10</td><td>10</td><td>10</td><td>-</td></tr> </table>									WV	160	200	250	350	400	420	450	500	Z-25°C/Z+20°C	3	3	3	6	6	6	6	6	Z-40°C/Z+20°C	4	4	4	10	10	10	10	-
WV	160	200	250	350	400	420	450	500																												
Z-25°C/Z+20°C	3	3	3	6	6	6	6	6																												
Z-40°C/Z+20°C	4	4	4	10	10	10	10	-																												
Load life	After an application of DC bias voltage plus the rated AC ripple current for 12000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.																																			
	<table border="1"> <tr> <td>Leakage current</td><td colspan="8">Less than specified value</td></tr> <tr> <td>Capacitance change</td><td colspan="8">Within $\pm 20\%$ of initial value</td></tr> <tr> <td>$\tan\delta$</td><td colspan="8">Less than 200% of specified value</td></tr> </table>									Leakage current	Less than specified value								Capacitance change	Within $\pm 20\%$ of initial value								$\tan\delta$	Less than 200% of specified value							
Leakage current	Less than specified value																																			
Capacitance change	Within $\pm 20\%$ of initial value																																			
$\tan\delta$	Less than 200% of specified value																																			
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																																			

● DRAWING

Unit : mm

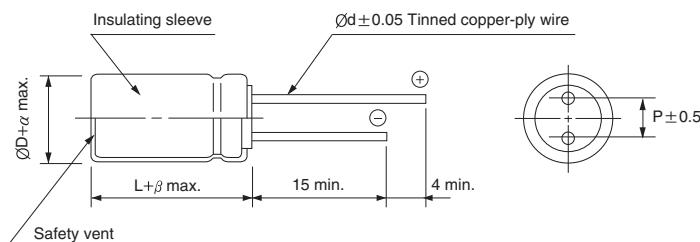

ØD	8	10	12.5	16	18	20
P	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.6	0.8	0.8	0.8
α			0.5		1.0	
β	1.5		2.0		3.0	

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV μF	Frequency	120Hz	300Hz	1kHz	10kHz	50kHz	100kHz ≤
		~ 15	0.30	0.50	0.60	0.90	1.00
160~450	22 ~ 47	0.40	0.50	0.70	0.90	0.95	1.00
	68 ~	0.50	0.60	0.80	0.90	0.95	1.00
500	~ 39	0.40	0.50	0.70	0.90	0.95	1.00
	47 ~	0.50	0.60	0.80	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

KJ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	160		200		250		350	
4.7						8 × 11.5	193	10 × 12.5	198
6.8						8 × 11.5	220	10 × 16	308
						10 × 12.5	319		
10	10 × 16	358	10 × 16	407		8 × 15	292	8 × 20	424
						10 × 16	407	10 × 20	462
22	10 × 16	572	10 × 20	638		10 × 20	580	12.5 × 20	743
27	10 × 16	611	10 × 20	638		10 × 20	660	12.5 × 20	784
33	10 × 16	690	10 × 20	825		12.5 × 20	853	16 × 20	858
39	10 × 20	759	12.5 × 20	839		12.5 × 20	886	16 × 20	880
47	10 × 20	924	12.5 × 20	1100		12.5 × 20	1100	16 × 25	1130
68	12.5 × 20	924	12.5 × 25	1188		16 × 20	1210	18 × 25	1220
			16 × 20	1210					
82	12.5 × 25	1040	16 × 25	1232		16 × 20	1340	18 × 25	1380
100	12.5 × 25	1210	16 × 25	1434		16 × 25	1540	18 × 31.5	1617
	16 × 20					18 × 20			
120	16 × 25	1325	16 × 25	1571		18 × 25	1645	18 × 35.5	1848
150	16 × 25	1645	18 × 25	1727		18 × 25	1914	18 × 40	2072
180	16 × 25	1782	18 × 25	1760		18 × 31.5	2024	20 × 41	2310
220	18 × 25	2090	18 × 31.5	2222		18 × 35.5	2200		
270	16 × 35.5	2200	18 × 35.5	2530					
330	16 × 40	2508	18 × 40	2750					
470	18 × 45	3084							

μF	WV	400		420		450		500	
1		8 × 11.5	72			8 × 11.5	90		
2.2		8 × 11.5	99			8 × 11.5	105		
3.3		8 × 11.5	160			8 × 11.5	145		
3.9		8 × 11.5	171			8 × 15	165		
4.7	8 × 15	176				8 × 20	242		
	10 × 12.5	242				10 × 12.5	242		
6.8	8 × 20	231				10 × 16	363		
	10 × 16	308				10 × 20	440		
10	10 × 20	462	10 × 20	462		10 × 20	440	12.5 × 20	413
						12.5 × 20	528		
15	12.5 × 20	528	12.5 × 20	528		12.5 × 20	528	12.5 × 25	440
						12.5 × 25	660		
22	12.5 × 25	792	12.5 × 25	745	12.5 × 25	890	16 × 20	500	
			16 × 20	780	16 × 20	900	16 × 25	675	
27	16 × 20	803	16 × 20	875	16 × 20	950	16 × 25	823	
33	16 × 20	960	12.5 × 30	980	16 × 25	1095	16 × 31.5	880	
			16 × 25	1035	18 × 20		18 × 25		
39	16 × 20	1000	16 × 25	1050	16 × 25	1100	16 × 31.5	1033	
47	16 × 25	1188	16 × 25	1125	18 × 25	1150	18 × 25	1000	
	18 × 20						18 × 31.5		
68	16 × 31.5	1309	18 × 25	1265	18 × 31.5	1180	18 × 35.5	1100	
							18 × 40		
82	18 × 31.5	1639	18 × 31.5	1450	18 × 35.5	1430	18 × 35.5	1250	
							18 × 40		
100	18 × 35.5	1810	18 × 35.5	1700	18 × 35.5	1740	18 × 45	1400	
							18 × 40		
120	18 × 40	2006	18 × 40	1700	18 × 45	1740	20 × 41	1600	
150	20 × 41	2244	20 × 41	2000					

↑ Ripple current (mA rms) at 105°C, 100kHz
↑ Case size ØD × L (mm)

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS




Upgrade

BN

For Network, High Ripple, 12000 hours at 105°C
Series

Long Life


- High reliability withstanding 12000 hours load life at 105°C
- For DC-DC convertor
- Complied to the RoHS directive



Item	Characteristics		
Operating temperature range	-40 ~ +105°C		
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minute) $I = 0.02CV + 25\mu A$ (after 5 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max. (at 120Hz, 20°C)	WV	400 ~ 500	
	$\tan\delta$	0.24	
Low temperature characteristics (Impedance ratio at 120Hz)	WV	400, 450	500
	Z-25°C/Z+20°C	6	6
	Z-40°C/Z+20°C	6	11
Load life	After an application of DC bias voltage plus the rated AC ripple current for 12000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.		
	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 30\%$ of initial value	
	$\tan\delta$	Less than 300% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING

Unit : mm

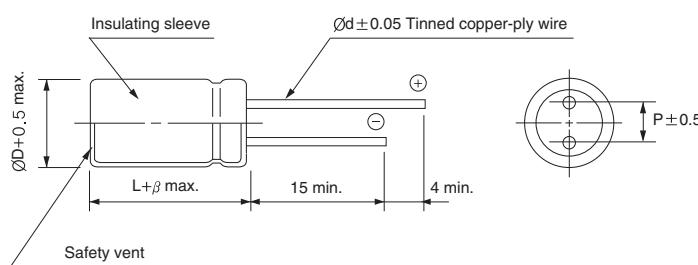

ØD	18
P	7.5
Ød	0.8
β	L ≤ 40mm 2.0 L ≥ 40mm 3.0

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	400		450		500	
		47	18 × 25	1150	18 × 25	1200	18 × 25
68		18	18 × 25	1300	18 × 25	1500	18 × 31.5
82		18	18 × 31.5	1400	18 × 31.5	1600	18 × 35.5
100		18	18 × 31.5	1500	18 × 31.5	1700	18 × 40
120		18	18 × 35.5	1700	18 × 35.5	1900	18 × 45
150		18	18 × 40	1850	18 × 40	2000	18 × 50
180		18	18 × 45	2050	18 × 45	2180	

Ripple current (mA rms) at 105°C, 100kHz
Case size ØD × L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
Coefficient	0.50	0.80	0.90	0.95	1.00


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

MP For Display, 15000 hours at 105°C Series



- High reliability withstanding 15000 hours load life at 105°C
- For power supply and adapter
- Complied to the RoHS directive


MT → MP
Long life



Item	Characteristics								
Operating temperature range	-40 ~ +105°C								
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minute) $I = 0.02CV + 25\mu A$ (after 5 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500
	$\tan\delta$	0.20			0.24				
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	420	450	500
	Z-25°C/Z+20°C	3	3	3	3	6	6	6	6
	Z-40°C/Z+20°C	4	4	4	6	6	6	6	6
Load life	After an application of DC bias voltage plus the rated AC ripple current for 15000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage. (where 12000 hours for Ø10)								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 20\%$ of initial value							
	$\tan\delta$	Less than 200% of specified value							
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

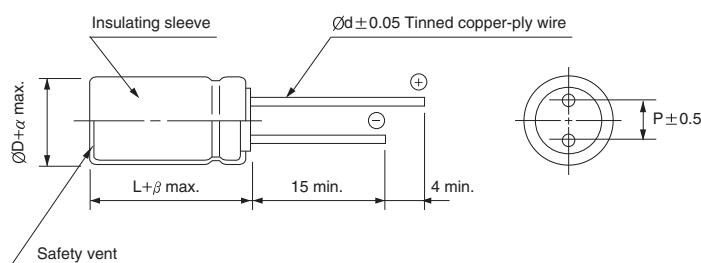

ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
α	0.5			
β	2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz ≤
10 ~ 82		1.00	1.75	2.25	2.35	2.50
100 ~ 470		1.00	1.67	2.05	2.15	2.25

MP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	160		200		250		350	
10		10 × 12.5	110	10 × 12.5	110	10 × 12.5	160	10 × 16	149
15		10 × 12.5	150	10 × 12.5	150	10 × 16	220	10 × 20	197
22		10 × 12.5	243	10 × 16	243	10 × 20	240	12.5 × 20	297
27		10 × 16	264	10 × 20	280	10 × 20	270	12.5 × 20	314
33		10 × 16	270	10 × 20	308	12.5 × 20	323	12.5 × 25	325
39		10 × 20	320	10 × 25	350	12.5 × 20	354	12.5 × 30	352
47		10 × 20	369	12.5 × 20	440	12.5 × 25	460	16 × 20	451
68		12.5 × 20	480	12.5 × 25	594	12.5 × 30	610	16 × 31.5	623
82		12.5 × 25	525	16 × 20	616	16 × 25	680	18 × 25	688
100		12.5 × 25	575	16 × 25	717	16 × 31.5	717	18 × 31.5	817
120		12.5 × 30	670	16 × 25	785	16 × 31.5	804	18 × 35.5	924
		16 × 25	670						
150		16 × 25	825	16 × 31.5	813	16 × 35.5	902	18 × 40	1083
180		16 × 25	591	16 × 35.5	951	18 × 35.5	1012	18 × 45	1230
220		16 × 31.5	968	18 × 31.5	1100	18 × 40	1121		
		18 × 25	968						
270		16 × 35.5	1100	18 × 40	1290				
330		16 × 40	1231	18 × 45	1390				
		18 × 31.5	1231						
470		18 × 45	1626						

μF	WV	400		420		450		500	
10		10 × 16	145	10 × 20	135	10 × 20	135	12.5 × 20	165
22		12.5 × 20	297	12.5 × 25	250	12.5 × 25	296	16 × 20	260
27		12.5 × 25	330	12.5 × 25	265	12.5 × 25	305	16 × 25	329
33		12.5 × 30	355	16 × 20	345	16 × 20	364	16 × 31.5	380
39		16 × 25	400	16 × 25	400	16 × 31.5	423	16 × 35.5	434
47		16 × 25	480	16 × 25	450	16 × 31.5	478	18 × 31.5	468
68		16 × 35.5	627	18 × 31.5	580	18 × 31.5	590	18 × 40	630
82		16 × 40	770	18 × 31.5	650	18 × 31.5	670	18 × 40	670
100		18 × 35.5	875	18 × 35.5	770	18 × 40	794	18 × 45	800
120		18 × 40	1000	18 × 45	900	18 × 45	940	18 × 50	920
150		18 × 45	1150						

Ripple current (mA rms) at 105°C, 120Hz
 Case size ØD×L (mm)

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS




For PSU, High Ripple, 20000 hours at 105°C
Series



- High reliability withstanding 20000 hours load life at 105°C
- For power supply and adapter
- Complied to the RoHS directive


MP → MJ
Long life



Item	Characteristics								
Operating temperature range	-40 ~ +105°C (160 ~ 450WV), -25 ~ +105°C (500WV)								
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minute) $I = 0.02CV + 25\mu A$ (after 5 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	420	450	500
	$\tan\delta$	0.20			0.24				
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	420	450	500
	Z-25°C/Z+20°C	3	3	3	3	6	6	6	6
	Z-40°C/Z+20°C	4	4	4	6	6	6	6	-
Load life	After an application of DC bias voltage plus the rated AC ripple current for 20000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage. (where 15000 hours for Ø10)								
	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 20\%$ of initial value							
	$\tan\delta$	Less than 200% of specified value							
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

DRAWING

Unit : mm

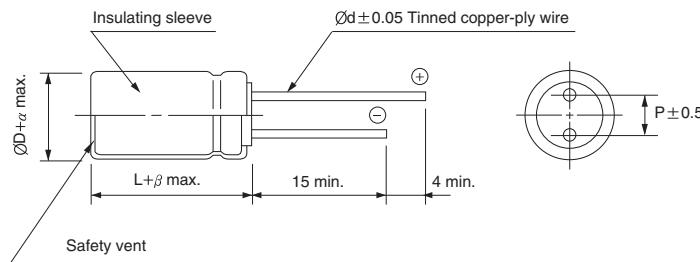

ØD	10	12.5	16	18	22
P	5.0	5.0	7.5	7.5	10.0
Ød	0.6	0.6	0.8	0.8	1.0
α	0.5			1.0	
β	2.0			3.0	

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz≤
3.3 ~ 82		1.00	1.75	2.25	2.35	2.50
100 ~ 470		1.00	1.67	2.05	2.15	2.25

MJ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	160		200		250		350	
6.8						10 × 12.5		119	10 × 12.5
10						10 × 12.5		160	10 × 16
15				10 × 12.5	150	10 × 16	220	10 × 20	197
22	10 × 12.5	221	10 × 16	243	243	10 × 20	240	12.5 × 20	297
	10 × 16	243				12.5 × 20	270	12.5 × 20	314
27	10 × 16	264	10 × 20	280	10 × 20	270	12.5 × 20	314	
33	10 × 16	270	10 × 20	308	12.5 × 20	323	12.5 × 25	325	
39	10 × 20	320	10 × 25	350	12.5 × 20	354	12.5 × 25	352	
47	10 × 20	369	12.5 × 20	440	12.5 × 25	460	12.5 × 30	451	
68	12.5 × 25	480	12.5 × 25	594	12.5 × 30	610	16 × 31.5	623	
82	12.5 × 25	525	12.5 × 30	640	16 × 25	680	18 × 25	688	
			16 × 20	616					
100	12.5 × 25	575	16 × 25	717	16 × 25	717	18 × 31.5	817	
120	12.5 × 30	670	16 × 25	785	16 × 31.5	804	18 × 35.5	924	
150	16 × 25	825	16 × 31.5	813	16 × 35.5	902	18 × 40	1083	
180	16 × 25	891	16 × 35.5	951	18 × 31.5	1012	18 × 45	1230	
220	16 × 31.5	968	18 × 31.5	1100	18 × 35.5	1121			
	18 × 25	968							
270	16 × 35.5	1100	18 × 40	1290					
330	18 × 31.5	1231	18 × 45	1390					
470	18 × 45	1626							

μF	WV	400		420		450		500	
3.3								10 × 12.5	63
4.7						10 × 12.5	76	10 × 16	83
6.8	10 × 16	85			10 × 16	110	10 × 20	119	
8.2	10 × 16	140	10 × 16	113	10 × 20	122	10 × 20	141	
10	10 × 16	145	10 × 20	135	10 × 20	135	12.5 × 20	165	
22	12.5 × 20	297	12.5 × 25	250	12.5 × 20	296	16 × 25	260	
					12.5 × 25	296			
27	12.5 × 25	330	12.5 × 25	265	12.5 × 30	305	16 × 25	329	
33	12.5 × 30	355	12.5 × 30	340	16 × 25	364	16 × 31.5	380	
			16 × 20	345					
39	16 × 25	400	16 × 25	400	16 × 31.5	423	16 × 35.5	434	
47	16 × 25	480	16 × 25	450	16 × 31.5	478	18 × 31.5	468	
68	16 × 35.5	627	18 × 31.5	580	18 × 31.5	590	18 × 40	630	
82	16 × 40	770	16 × 40	620	18 × 35.5	670	18 × 45	685	
100	18 × 35.5	875	18 × 35.5	770	18 × 40	794	18 × 50	800	
							22 × 41		
120	18 × 40	1003	18 × 45	900	18 × 50	940	22 × 51	960	
150	18 × 50	1192							


↑ Ripple current (mA rms) at 105°C, 120Hz
 ↑ Case size ØD × L (mm)

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RB High Temperature, For 125°C Use Series

- Load life of 2000 hours at 125°C
- For Electronic Control unit and other high temperature applications
- Complied to the RoHS directive


S
Solvent Proof
WV \leq 100V



Item	Characteristics											
Operating temperature range	WV \leq 50: -55 ~ +125°C, WV \geq 63: -40 ~ +125°C											
Leakage current max.	WV \leq 50: I = 0.01CV or 3 μ A whichever is greater (after 2 minutes) WV \geq 63: 0.03CV +10 μ A (after 5 minutes)											
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000 μ F : tan δ increases by 0.02 for each 1000 μ F from below value.											
	Rated Voltage(V)	6.3	10	16	25	35	50	63 ~ 100 160 ~ 250				
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.08 0.15				
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3 ~ 10			16 ~ 250							
	Z-25°C/Z+20°C	3			2							
	Z-40°C/Z+20°C	5			4							
Load life (after application of the rated voltage for 2000 hours at 125°C)	Leakage current	Less than specified value										
	Capacitance change	Within $\pm 20\%$ of initial value										
	tan δ	Less than 300% of specified value										
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and tan δ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

DRAWING

Unit : mm

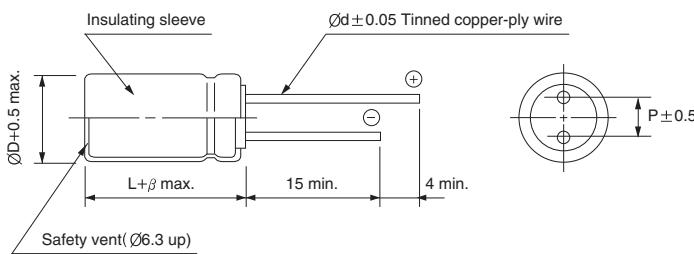

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz \leq
6.3~100	~ 47	0.38	0.50	0.78	1.00	1.00	1.00
	68 ~ 680	0.46	0.57	0.77	0.86	0.93	1.00
	1000 ~	0.57	0.67	0.77	0.77	0.88	1.00
160~250	1 ~ 33	0.44	0.56	0.78	0.89	0.94	1.00

RB series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3		10		16	
	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz
47					5×11	165
68			5×11	165	6.3×11	230
100	5×11	160	6.3×11	220	6.3×11	280
150	6.3×11	240	6.3×11	280	8×11.5	410
220	6.3×11	300	8×11.5	410	8×11.5	485
330	8×11.5	310	8×11.5	485	10×12.5	660
470	10×12.5	605	10×12.5	635	10×16	815
680	10×16	740	10×16	815	10×20	1075
1000	10×20	1005	10×20	1120	12.5×20	1490
1500	10×25	1290	12.5×20	1495	12.5×25	1755
2200	12.5×20	1520	12.5×25	1805	16×20	1900
3300	12.5×25	1805	16×20	1955	16×25	2210
4700	16×25	2045	16×31.5	2555	16×35.5	2830
6800	16×31.5	2505	16×35.5	2830	18×35.5	3060
10000	16×40	2905	18×40	3210		
15000	18×40	3125				

WV Item μF	25		35		50	
	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz
1.0					5×11	40
1.5					5×11	50
2.2					5×11	55
3.3					5×11	70
4.7					5×11	85
6.8					5×11	95
10					5×11	120
15					5×11	155
22		5×11		170	6.3×11	205
33	5×11	165	6.3×11	240	6.3×11	255
47	6.3×11	220	6.3×11	285	8×11.5	365
68	6.3×11	275	8×11.5	405	8×11.5	435
100	8×11.5	405	8×11.5	485	10×16	615
150	8×11.5	485	10×12.5	660	10×20	865
220	10×12.5	635	10×16	815	10×25	1100
330	10×16	790	10×20	1120	12.5×20	1330
470	10×20	1075	12.5×20	1480	12.5×25	1585
680	12.5×20	1470	12.5×25	1755	16×20	1720
1000	12.5×25	1755	16×20	1870	16×31.5	2240
1500	16×20	1870	16×31.5	2520	16×40	2545
2200	16×25	2165	16×35.5	2830	18×40	2705
3300	16×35.5	2830	18×40	3210		
4700	18×40	3125				

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RB series


● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	63		100		160	
	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz
1.0			8×11.5	25	10×12.5	20
2.2			8×11.5	45	10×16	32
3.3			10×16	60	10×16	42
4.7			10×16	70	10×20	50
10	8×11.5	80	10×20	110	12.5×20	85
22	10×16	150	12.5×25	205	16×25	155
33	10×20	200	16×25	280	16×31.5	210
47	12.5×20	280	16×31.5	370		
100	12.5×25	445				

WV Item μF	200		250	
	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing\text{D} \times \text{L}$ (mm)	Ripple current (mA rms) 125°C 100kHz
1.0	10×12.5	20	10×12.5	18
2.2	10×16	32	10×16	32
3.3	10×20	42	10×20	42
4.7	10×20	50	12.5×20	60
10	12.5×20	95	16×25	105
22	16×31.5	170		

WP 125°C, Low ESR, Long Life Series


- Downsize and long life
- Low ESR at -40°C
- Endurance with ripple current : 5000 hours at 125°C
- Complied to the RoHS directive



Item	Characteristics				
Operating temperature range	-40 ~ +125°C				
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)				
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C				
Dissipation factor max. (at 120Hz, 20°C)	Rated Voltage(V)	35	50	80	100
	$\tan\delta$	0.12	0.10	0.10	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	35	50	80	100
	Z-25°C/Z+20°C	2	2	2	2
	Z-40°C/Z+20°C	4	4	4	4
Load life (after application of the rated voltage for 5000 hours at 125°C)	Leakage current	Less than specified value			
	Capacitance change	Within $\pm 30\%$ of initial value			
	$\tan\delta$	Less than 300% of specified value			
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4				

● DRAWING

Unit : mm

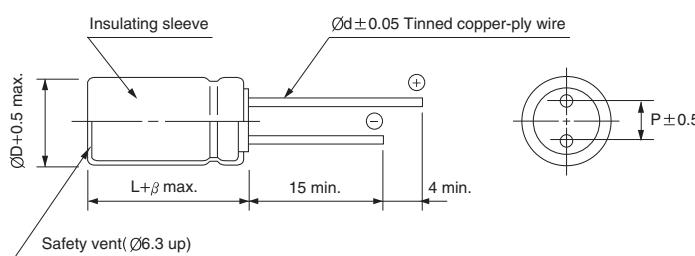

ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
β	1.5	1.5	2.0	

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
270 ~ 560		0.50	0.85	0.95	0.99	1.00
680 ~ 1800		0.60	0.90	0.95	0.99	1.00
2200 ~ 3300		0.75	0.90	0.95	0.99	1.00
4700 ~		0.85	0.95	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

WP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	35			50		
	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
470				12.5 × 20	0.065	1500
560	10 × 20	0.070	1700	12.5 × 25	0.060	1700
680	12.5 × 20	0.044	1820	12.5 × 25	0.048	1900
				16 × 20	0.043	2040
820	12.5 × 25	0.042	2100	12.5 × 25	0.043	2150
				12.5 × 30	0.041	2150
1000	12.5 × 25	0.033	2400	16 × 25	0.031	2620
				18 × 20	0.039	2240
1200	12.5 × 30	0.029	2560	16 × 31.5	0.027	2940
	16 × 20	0.034	2280	18 × 25	0.029	2750
1500	18 × 20	0.032	2490	16 × 35.5	0.023	3300
1800	16 × 25	0.026	3100	18 × 31.5	0.026	3140
2200	16 × 31.5	0.023	3160	16 × 40	0.020	3720
	18 × 25	0.024	3200	18 × 35.5	0.022	3510
2700	16 × 35.5	0.020	3590	18 × 40	0.018	3940
	18 × 31.5	0.022	3390			
3300	16 × 40	0.017	4300			
	18 × 35.5	0.019	4200			
4700	18 × 40	0.016	4600			

WV Item μF	80			100		
	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
270				18 × 20	0.091	1690
300				16 × 25	0.079	1990
330	12.5 × 30	0.085	1790	16 × 31.5	0.065	2200
	16 × 20	0.085	1790			
470	16 × 25	0.061	2140	16 × 35.5	0.056	2500
	12.5 × 30	0.10	2140			
	18 × 20	0.07	1910			
560	16 × 31.5	0.053	2330	16 × 40	0.046	2700
	18 × 25	0.049	2280			
680	16 × 25	0.045	2300	18 × 40	0.039	2880
	16 × 35.5	0.044	2580			
820	16 × 40	0.036	2900			
	18 × 35.5	0.035	2890			
1200	18 × 40	0.030	3210			


WT

High Temperature, For 125°C Use
Long Life Series

- Load life of 5000 hours at 125°C
- Low impedance at high frequency
- For electronic control unit and other high temperature applications
- Complied to the RoHS directive

Low Impedance Solvent Proof


RB → WT
Long life
Low Imp.



Item	Characteristics							
Operating temperature range	-40 ~ +125°C							
Leakage Current max.	$I = 0.03CV$ or $3\mu A$ whichever is greater (after 2 minutes)							
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C							
Dissipation Factor max. (at 120Hz, 20°C)	Capacitance $> 1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.							
	WV	6.3	10	16	25	35	50	63
	$\tan\delta$	0.22	0.20	0.16	0.14	0.12	0.10	0.10
	WV	100						
Low temperature characteristics (Impedance ratio at 120Hz)	Z-25°C/Z+20°C	3	3	3	2	2	2	2
	Z-40°C/Z+20°C	6	6	4	3	3	3	3
Load life (after application of the rated voltage for 5000 hours at 125°C)	Capacitance change	Within $\pm 30\%$ of initial value						
	$\tan\delta$	Less than 300% of the specified value						
	Leakage current	Less than specified value						
	$\emptyset D$	$\emptyset D = 5, 6.3$		$\emptyset D = 8$	$\emptyset D \geq 10$			
	Life time	2000 hours		3000 hours	5000 hours			
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4							

● DRAWING

Unit : mm

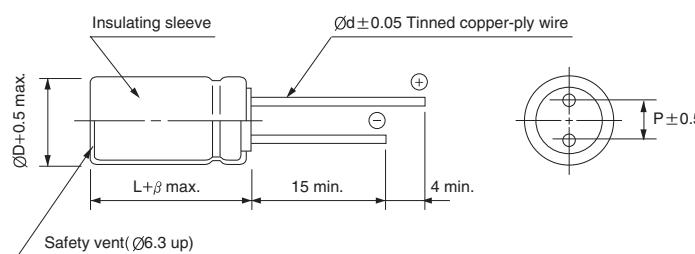

$\emptyset D$	5	6.3	8	10	12.5	16
P	2.0	2.5	3.5	5.0	5.0	7.5
$\emptyset d$	0.5	0.5	0.6	0.6	0.6	0.8
β	1.5		2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 33		0.20	0.50	0.80	0.90	1.00
47 ~ 100		0.25	0.60	0.90	0.95	1.00
150 ~ 220		0.35	0.70	0.92	0.96	1.00
330 ~ 680		0.45	0.75	0.95	0.97	1.00
1000 ~ 1500		0.50	0.80	0.96	0.98	1.00
2200 ~		0.55	0.85	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

WT series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	6.3			10			16			25		
	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
47										5 × 11	0.80	250
68				5 × 11	0.80	250	5 × 11	0.80	250	6.3 × 11	0.34	405
100	5 × 11	0.80	250	6.3 × 11	0.34	405	6.3 × 11	0.34	405	6.3 × 11	0.34	405
150	6.3 × 11	0.34	405	6.3 × 11	0.34	405	6.3 × 11	0.34	405	8 × 11.5	0.28	760
220	6.3 × 11	0.34	405	8 × 11.5	0.30	760	8 × 11.5	0.28	760	10 × 12.5	0.14	1030
330	8 × 11.5	0.28	760	8 × 11.5	0.28	760	10 × 12.5	0.14	1030	10 × 16	0.10	1430
470	10 × 12.5	0.14	1030	10 × 12.5	0.14	1030	10 × 16	0.10	1430	10 × 20	0.08	1500
680	10 × 16	0.10	1430	10 × 16	0.10	1430	10 × 20	0.06	1500	12.5 × 20	0.06	1720
1000	10 × 20	0.06	1500	10 × 20	0.06	1500	12.5 × 20	0.06	1720	12.5 × 25	0.05	1900
1500	10 × 25	0.06	1620	12.5 × 20	0.06	1720	12.5 × 25	0.05	1900			
2200	12.5 × 20	0.06	1720	12.5 × 25	0.05	1900						
3300	12.5 × 25	0.05	1900									

WV μF	35			50			63			100		
	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
10												
22	5 × 11	0.80	250							10 × 12.5	0.80	480
33	6.3 × 11	0.34	405	8 × 11.5	0.70	300	8 × 11.5	1.50	150	10 × 12.5	0.80	480
47	6.3 × 11	0.34	405	8 × 11.5	0.70	440	10 × 12.5	0.59	530	10 × 16	0.65	630
68	8 × 11.5	0.28	760									
100	8 × 11.5	0.19	760	10 × 12.5	0.40	555	10 × 16	0.41	690	12.5 × 20	0.25	990
150	10 × 12.5	0.14	1030									
220	10 × 16	0.10	1430	10 × 20	0.15	930	12.5 × 20	0.16	1050	16 × 25	0.11	1500
330	10 × 25	0.06	1620	12.5 × 20	0.13	1330	12.5 × 25	0.12	1290	16 × 31.5	0.08	1790
470	12.5 × 20	0.06	1720	12.5 × 25	0.10	1650	12.5 × 34.5	0.10	1460			
680	12.5 × 25	0.05	1900	16 × 31.5	0.05	2430						



130°C, Long Life, Low Impedance
Series




Low Impedance



Miniaturized



Solvent Proof
WV ≤ 100V




- For LED Lighting, LED Display
- High reliability withstanding 4000 hours load life at 130°C
- Complied to the RoHS directive

Item	Characteristics											
Operating temperature range	-40 ~ +130°C(10 ~ 100WV), -25 ~ +130°C(200, 400WV)											
Leakage current max.	WV ≤ 100						WV > 100					
	I = 0.01CV or 3μA whichever is greater (after 2 min.) I = 0.03CV or 4μA whichever is greater (after 1 min.)						I = 0.02CV + 15μA (after 5 min.)					
Capacitance tolerance	±20% at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.											
	WV	10	16	25	35	50	63	100	200	400		
Low temperature characteristics (Impedance ratio at 120Hz)	tanδ	0.19	0.16	0.14	0.12	0.1	0.09	0.08	0.15	0.2		
	WV	10	16	25	35	50	63	100	200	400		
	Z-25°C/Z+20°C	3	2	2	2	2	2	2	3	6		
Load life (after application of the rated voltage for 4000 hours at 130°C)	Z-40°C/Z+20°C	6	4	3	3	3	3	3	-	-		
	Rated voltage (Vdc)	10 ~ 100WV				200, 400WV						
	Capacitance change	Within ±30% of initial value				Within ±20% of initial value						
Shelf life (at 130°C)	tanδ	Within ±300% of initial value				Within ±200% of initial value						
	Leakage current	Less than specified value										
	ØD	~100V				Life time(hrs)						
	ØD = 6.3	1,000				200, 400V						
	ØD = 8,10	2,000				3,000						
	ØD ≥ 12.5	4,000				-						
Shelf life (at 130°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

DRAWING

Unit : mm

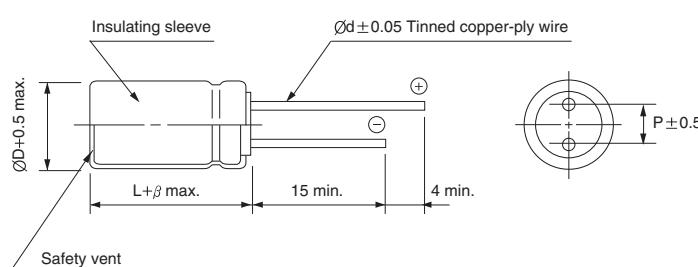

ØD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.6	0.8	0.8
β	1.5		2.0		

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
10~100	~ 4.7	0.42	0.60	0.80	0.90	1.00
	10 ~ 33	0.55	0.75	0.90	0.95	1.00
	47 ~ 330	0.70	0.85	0.95	0.98	1.00
	470 ~ 1500	0.75	0.90	0.98	1.00	1.00
	2200 ~	0.80	0.95	1.00	1.00	1.00
200, 400	~ 5.6	0.20	0.40	0.80	0.90	1.00
	6.8 ~ 15	0.30	0.60	0.90	0.95	1.00
	22 ~	0.50	0.80	0.90	0.95	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

LJ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10			16			25			35			50			
	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	
4.7														8 × 11.5	1.000	100
10														8 × 11.5	0.800	200
22														8 × 11.5	0.800	260
33														8 × 11.5	0.600	300
47														8 × 11.5	0.600	300
100											8 × 11.5	0.220	360	10 × 12.5	0.180	520
220								8 × 11.5	0.220	360	10 × 12.5	0.150	620	10 × 20	0.082	890
330	8 × 11.5	0.220	360	8 × 11.5	0.220	360	10 × 12.5	0.150	620	10 × 16	0.100	800	12.5 × 20	0.065	1000	
470	10 × 12.5	0.150	620	10 × 12.5	0.150	620	10 × 16	0.100	800	10 × 20	0.073	960	12.5 × 25	0.051	1200	
1000	10 × 20	0.070	960	10 × 20	0.070	960	12.5 × 20	0.060	1100	12.5 × 25	0.040	1430	16 × 31.5	0.037	2180	
2200	12.5 × 25	0.040	1430	12.5 × 25	0.040	1430	16 × 31.5	0.034	2300	16 × 35.5	0.031	2550	18 × 40	0.029	2800	
3300	16 × 25	0.038	1900	16 × 31.5	0.034	2300	16 × 35.5	0.031	2550	18 × 35.5	0.028	2800				
4700	16 × 31.5	0.034	2300	16 × 35.5	0.031	2550										


WV Item μF	63			100			200			400		
	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	IMP. (Ω)max. 20°C 100kHz	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	Ripple current (mA rms) 130°C 100kHz	$\varnothing D \times L$ (mm)	Ripple current (mA rms) 130°C 100kHz
1.0										8 × 11.5	65	
1.5										8 × 11.5	75	
1.8										8 × 15	80	
2.2										8 × 11.5	75	
2.7										8 × 15	90	
3.3										8 × 20	110	
4.7				8 × 11.5	1.300	100	8 × 11.5	120		8 × 15	95	
5.6							8 × 11.5	130		8 × 20	115	
6.8							8 × 15	180		8 × 20	120	
10				8 × 11.5	1.000	200	8 × 15	200		8 × 20	125	
15							8 × 15	240		8 × 20	130	
22				8 × 11.5	1.000	220	8 × 15	240		10 × 16	145	
33	8 × 11.5	0.500	250	10 × 12.5	0.670	260	10 × 20	320				
47	10 × 12.5	0.370	400	10 × 16	0.330	330						
100	10 × 16	0.300	450	12.5 × 20	0.170	670						
220	12.5 × 20	0.120	820	16 × 25	0.130	1100						
330	12.5 × 25	0.102	1000	16 × 31.5	0.100	1300						
470	16 × 25	0.089	1500	18 × 31.5	0.092	1600						
1000	16 × 31.5	0.076	1850									
1500	18 × 40	0.063	2350									

BK

For PSU, High Temperature Series

- High reliability withstanding 5000 hours load life at 125°C
- Suitable for compact energy saving lamp
- Complied to the RoHS directive


RH → BK
High Temp.



Item	Characteristics												
Operating temperature range	-25 ~ +125°C												
Leakage current max.	$I = 0.03CV + 15\mu A$ ($CV \leq 1000$), $I = 0.02CV + 25\mu A$ ($CV > 1000$) (after 5 minutes)												
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C												
Dissipation factor max. (at 120Hz, 20°C)	Rated Voltage(V)	160	200	250	350	400	450						
	$\tan\delta$	0.15	0.15	0.15	0.20	0.24	0.24						
Low temperature characteristics (Impedance ratio at 120Hz)	WV	160	200	250	350	400	450						
	$Z-25^\circ C/Z+20^\circ C$	3	3	3	6	6	6						
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.												
	Leakage current	Less than specified value											
	Capacitance change	Within $\pm 20\%$ of initial value											
	$\tan\delta$	Less than 200% of specified value											
450WV products are for 2000 hours.													
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4												

● DRAWING

Unit : mm

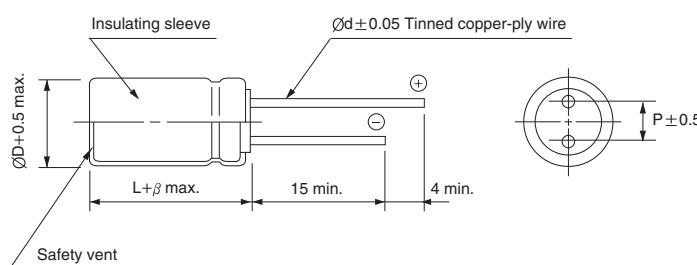

ØD	10	12.5	16
P	5.0	5.0	7.5
Ød	0.6	0.6	0.8
β	2.0		

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT


μF	WV	160		200		250		350		400		450	
2.2								10 × 12.5	135	10 × 12.5	135		
3.3								10 × 12.5	135	10 × 16	180	10 × 16	150
4.7		10 × 12.5	135	10 × 12.5	150	10 × 12.5	150	10 × 16	195			10 × 20	255
						10 × 16	180	10 × 20	255			10 × 25	156
10	10 × 12.5	165	10 × 12.5	195	10 × 16	210				12.5 × 20	375	12.5 × 20	375
	10 × 16	210	10 × 16	240	10 × 20	255				12.5 × 20	375	12.5 × 20	232
22	10 × 20	420	10 × 20	420	12.5 × 20	450						16 × 25	415
33	12.5 × 20	600	12.5 × 20	600	12.5 × 25	675						16 × 31.5	548
47	12.5 × 25	780	12.5 × 25	780									

Ripple current (mA rms) at 125°C, 100kHz
Case size ØD × L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	60Hz	120Hz	1kHz	10kHz	50kHz	100kHz
Coefficient	0.30	0.40	0.70	0.90	0.95	1.00


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Item	Characteristics															
Operating temperature range	WV				25 ~ 450				500							
	Temperature range				-40 ~ +105°C				-25 ~ +105°C							
Leakage current max.	WV≤100								WV > 100							
	I = 0.01CV or 3μA whichever is greater (after 2 min.)								I = 0.02CV+15μA (after 5 min.)							
Capacitance tolerance	±20% at 120Hz, 20°C															
Dissipation factor max. (at 120Hz, 20°C)	WV	25	35	50	160	200	250	350	400	450	500					
	tanδ	0.14	0.12	0.10	0.15	0.15	0.15	0.20	0.24	0.24	0.24					
Low temperature characteristics (Impedance ratio at 120Hz)	WV	25	35	50	160	200	250	350	400	450	500					
	Z-25°C/Z+20°C	2	2	2	3	3	4	4	6	6	6					
	Z-40°C/Z+20°C	3	3	3	4	4	4	8	10	10	-					
Load life	After an application of DC bias voltage plus the rated AC ripple current for 5000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.															
	Rated voltage (Vdc)			25 ~ 50				160 ~ 500								
	Capacitance change			Within ±25% of initial value				Within ±20% of initial value								
	tanδ			Less than 200% of specified value												
	Leakage current			Less than specified value												
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4															

DRAWING

Unit : mm

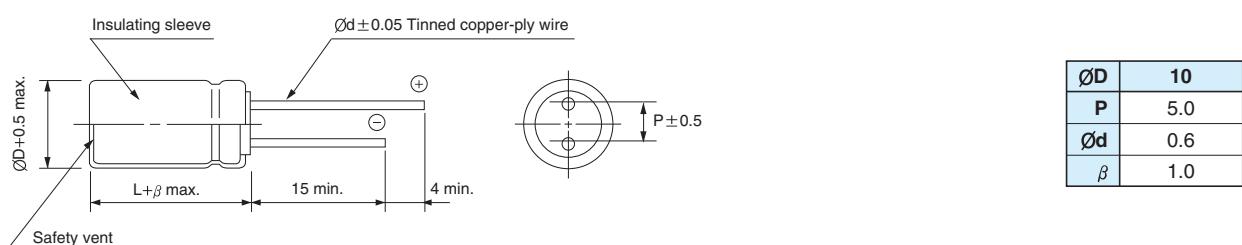

Vdc	Cap.(μF)	ØD × L (mm)	Rated ripple current (mA rms / 105°C)		
			120Hz	50kHz	100kHz
25	470	10 × 12.5	680	1987	2092
35	330		680	1862	1960
50	220		495	1568	1650
160	27		240	608	640
200	22		220	565	595
250	6.8		123	323	340
250	15		174	485	510
350	10		145	394	415
400	8.2		132	342	360
450	3.3		92	292	307
500	4.7		88	181	190

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Upgrade

VP

135°C, Long Life, Low Impedance
Series

- Applied Laminated case series
- Suited for automobile applications
- Complied to the RoHS directive
- AEC-Q200 compliant. Please contact us for details


RB → **VP**
Long Life
High Temp.



Item	Characteristics			
Operating temperature range	-40 ~ +135°C			
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes)			
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C			
Dissipation factor max. (at 120Hz, 20°C)	Rated Voitafe(V)	10	16	25
	$\tan\delta$	0.20	0.16	0.14
				0.12
Low temperature characteristics (Impedance ratio at 120Hz)	WV	10	16	25
	Z-25°C/Z+20°C	3	2	2
	Z-40°C/Z+20°C	6	4	3
Load life (after application of the rated voltage for 3000 hours at 135°C)	Leakage current	Less than specified value		
	Capacitance change	Within $\pm 30\%$ of initial value		
	$\tan\delta$	Less than 300% of specified value		
Shelf life (at 135°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4			


● DRAWING

Unit : mm

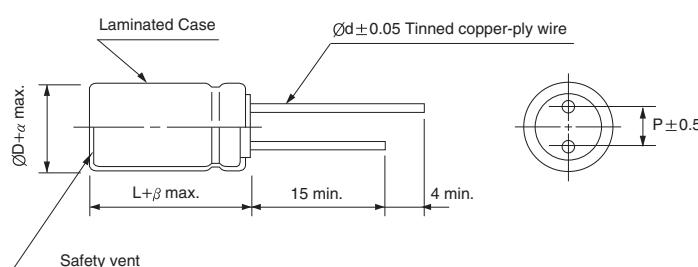


ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
α		0.5		
β		2.0		

(Ø10)

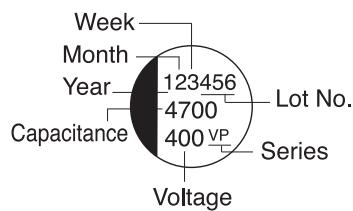

(Ø12.5≤)



● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 330		0.50	0.85	0.95	0.97	1.00
470 ~ 1500		0.55	0.90	0.98	0.99	1.00
2200 ~		0.60	0.95	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

VP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10			16		
	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 135°C 100kHz	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 135°C 100kHz
470	10 × 12.5	0.15	690	10 × 12.5	0.10	960
1000	10 × 20	0.07	1005	10 × 20	0.060	1150
2200	12.5 × 25	0.050	1280	12.5 × 25	0.060	1430
3300	12.5 × 30	0.050	1900	12.5 × 30	0.050	2300
4700	12.5 × 34.5	0.040	2300	12.5 × 34.5	0.040	2550
	16 × 25	0.035	2200	16 × 25	0.035	2440
5600	18 × 25	0.030	3300	18 × 25	0.030	3660
6800	18 × 31.5	0.028	3600	18 × 31.5	0.028	4000

WV Item μF	25			35		
	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 135°C 100kHz	$\text{\O}D \times L$ (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 135°C 100kHz
220				10 × 12.5	0.15	620
330				10 × 16	0.10	800
470	10 × 20	0.10	1130	10 × 20	0.070	960
1000	12.5 × 25	0.060	1800	12.5 × 30	0.040	1430
1500	12.5 × 30	0.055	2000	16 × 25	0.038	2100
2200	12.5 × 30	0.050	2300	18 × 25	0.035	2500
	16 × 25	0.050	2200			
3300	18 × 25	0.045	3300	18 × 25	0.032	2700
				18 × 31.5	0.032	3800
3900	18 × 25	0.040	3400	18 × 25	0.032	2900
	18 × 31.5	0.040	3600	18 × 35.5	0.032	3900
4700	16 × 25	0.035	2870			
	18 × 31.5	0.040	3600			

VQ 150°C, High Temperature Range Series

- Applied Laminated case series
- Suited for automobile applications
- Complied to the RoHS directive
- AEC-Q200 compliant. Please contact us for details


VP → VQ
High Temp.



Item	Characteristics								
Operating temperature range	-40 ~ +150°C								
Leakage current max.	$I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minute)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	Rated Voitafe(V)	10	16	25	35	50	63	80	100
	$\tan\delta$	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08
Low temperature characteristics (Impedance ratio at 120Hz)	WV	10	16	25	35	50	63	80	100
	Z-25°C/Z+20°C	3	2	2	2	2	2	2	2
	Z-40°C/Z+20°C	4	4	4	4	4	4	4	4
Load life (after application of the rated voltage for 1000 hours at 150°C)	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 30\%$ of initial value							
	$\tan\delta$	Less than 300% of specified value							
Shelf life (at 150°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								


DRAWING

Unit : mm

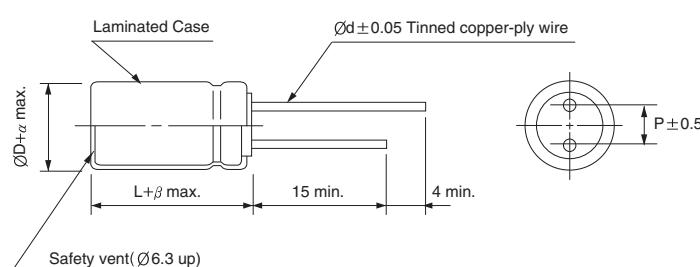


ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
α	0.5			
β	2.0			

(Ø10)

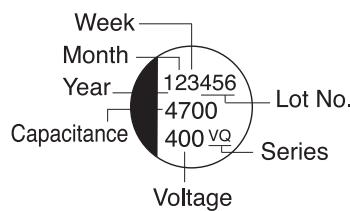

(Ø12.5)



FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

CV	Frequency	120Hz	1kHz	50kHz	100kHz ≤
$1000 \leq CV$		0.67	0.91	0.95	1.00
$1000 > CV$		0.50	0.83	0.91	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

VQ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10		16		25		35	
	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz
82							10×12.5	620
100							10×16	660
220					10×16	660	12.5×20	700
330			10×16	660	12.5×20	760	12.5×25	840
470	10×12.5	660	10×20	760	12.5×25	840	12.5×30	1000
							16×25	1000
1000	10×20	760	12.5×25	840	12.5×34.5	1100	18×31.5	1700
					16×25	1100		
2200	12.5×25	840	12.5×34.5	1100				
			16×25	1100	18×31.5	1700		
3300	12.5×34.5	1100						
	16×25	1100	18×31.5	1700				
4700	18×25	1700						
5600	18×31.5	1900						


WV Item μF	50		63		80		100	
	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz	$\varnothing D \times L(\text{mm})$	Ripple current (mA rms) 150°C, 100kHz
33							10×12.5	260
47					10×12.5	260	10×16	330
56			10×12.5	450	10×16	330	10×16	390
68			10×16	650	10×16	390	10×20	465
100	10×16	700	10×20	820	10×20	465	12.5×20	670
220	12.5×20	890	12.5×25	1000	12.5×25	670	12.5×30	1100
330	12.5×25	1000	12.5×30	1300	12.5×34.5	1100	18×31.5	1500
470	12.5×30	1200	16×25	1500	18×25	1600	18×31.5	1750
560	12.5×34.5	1300			18×31.5	1700		
	16×25	1300	18×25	1650				
680			18×31.5	1850	18×31.5	1900		

NPNon-Polarized
Series

- Standard non-polarized series
- Designed for use in circuits with reversing polarity
- Higher voltage ratings available up to 250V
- Load life of 2000 hours at 85°C
- Complied to the RoHS directive




Non-polarized

Solvent Proof
 $WV \leq 100V$ SD → **NP**
Non-polar

Item	Characteristics											
Operating temperature range	-40 ~ +85°C											
Leakage current max.	$I = 0.03CV$ or $3\mu A$ whichever is greater (after 5 minutes)											
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.											
	WV	6.3	10	16	25	35	50	63	80	100	160	200,250
	$\tan\delta$	0.25	0.23	0.20	0.15	0.15	0.12	0.12	0.12	0.12	0.15	0.20
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16				25~100		160~250		
	Z-25°C/Z+20°C	4	3	2				2		3		
	Z-40°C/Z+20°C	10	8	6				4		5		
Load life (after application of the rated voltage for 2000 hours at 85°C)	Leakage current	Less than specified value										
	Capacitance change	Within $\pm 20\%$ of initial value										
	$\tan\delta$	Less than 200% of specified value										
	Test method	Polarity reverse each 250 hours										
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4											

● DRAWING

Unit : mm

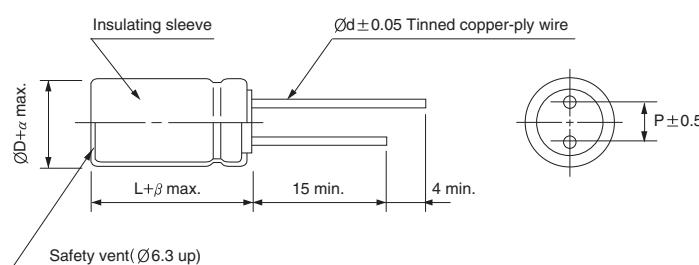

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α					0.5			1.0
β	1.5			2.0				3.0

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	50Hz	120Hz	1kHz	10kHz \leq
~ 47		0.75	1.00	1.55	2.00
68 ~ 680		0.80	1.00	1.34	1.50
1000 ~		0.85	1.00	1.13	1.15

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

NP series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	6.3	10	16	25	35	50	63	80	100	160	200	250
1.0						5 × 11 18	5 × 11 18	5 × 11 18	5 × 11 18			
1.5						5 × 11 21	5 × 11 21	5 × 11 21	5 × 11 21			
2.2						5 × 11 26	5 × 11 26	5 × 11 26	5 × 11 26			
3.3						5 × 11 32	5 × 11 32	5 × 11 32	5 × 11 32	10 × 16 49	10 × 16 42	10 × 20 46
4.7						5 × 11 38	5 × 11 38	5 × 11 38	6.3 × 11 44	10 × 16 59	10 × 20 55	12.5 × 20 63
6.8						5 × 11 46	5 × 11 46	6.3 × 11 52	8 × 11.5 62	10 × 20 77	12.5 × 20 78	12.5 × 20 78
10						5 × 11 55	6.3 × 11 64	6.3 × 11 64	8 × 11.5 75	12.5 × 20 109	12.5 × 20 95	12.5 × 25 103
15						5 × 11 61	6.3 × 11 78	6.3 × 11 78	8 × 11.5 92	10 × 12.5 107	12.5 × 20 134	12.5 × 25 127
22						5 × 11 73	6.3 × 11 84	6.3 × 11 94	8 × 11.5 111	10 × 12.5 129	12.5 × 25 142	16 × 25 170
33			5 × 11 78	6.3 × 11 103	6.3 × 11 103	8 × 11.5 136	10 × 12.5 158	10 × 12.5 173	10 × 20 189	16 × 25 240	16 × 35.5 239	18 × 35.5 256
47		5 × 11 87	6.3 × 11 107	6.3 × 11 123	8 × 11.5 145	10 × 12.5 189	10 × 16 207	10 × 20 226	12.5 × 20 265	16 × 35.5 329	18 × 40 321	
68	5 × 11 100	6.3 × 11 120	6.3 × 11 129	8 × 11.5 175	10 × 12.5 203	10 × 16 249	10 × 20 272	12.5 × 20 319	12.5 × 25 348	18 × 35.5 425		
100	6.3 × 11 139	6.3 × 11 145	8 × 11.5 184	10 × 12.5 247	10 × 16 270	10 × 20 329	10 × 20 329	12.5 × 20 387	16 × 25 468			
150	6.3 × 11 171	8 × 11.5 210	10 × 12.5 262	10 × 16 331	10 × 20 361	10 × 20 404	12.5 × 20 474	12.5 × 25 516	16 × 25 573			
220	8 × 11.5 244	10 × 12.5 295	10 × 16 347	10 × 20 437	10 × 20 437	12.5 × 20 574	12.5 × 25 625	16 × 25 694	16 × 35.5 797			
330	10 × 12.5 347	10 × 16 396	10 × 20 464	10 × 20 535	12.5 × 20 628	16 × 25 850	16 × 25 850	16 × 35.5 976	18 × 40 1098			
470	10 × 16 454	10 × 20 516	10 × 20 553	12.5 × 20 750	12.5 × 25 818	16 × 31.5 1110	16 × 35.5 1164	18 × 40 1311	22 × 41 1443			
680	10 × 20 595	12.5 × 20 729	12.5 × 20 781	12.5 × 25 984	16 × 25 1091	18 × 35.5 1503	18 × 40 1577	22 × 41 1736				
1000	12.5 × 20 847	12.5 × 20 883	12.5 × 25 1033	16 × 25 1323	16 × 35.5 1519	18 × 40 1912	22 × 41 2105					
1500	12.5 × 20 999	12.5 × 25 1132	16 × 25 1338	16 × 35.5 1748	18 × 40 1968	22 × 41 2386						
2200	12.5 × 25 1272	16 × 25 1463	16 × 35.5 1781	18 × 40 2254	22 × 41 2481							
3300	16 × 25 1672	16 × 35.5 1985	18 × 40 2360	22 × 41 2890								
4700	16 × 35.5 2221	18 × 40 2579	22 × 41 2987									
6800	18 × 41 2840	22 × 41 3214										
10000	22 × 41 3516	22 × 41 3516										

Case size ØD × L (mm)
Ripple current (mA rms) at 85°C, 120Hz

NSNon-Polarized, Height 7mmL
Series

Non-polarized



Solvent Proof

SS → **NS**

Non-polar




- Non-polarized series with 7mmL height
- Load life of 2000 hours at 85°C
- Complied to the RoHS directive

Item	Characteristics								
Operating temperature range	-40 ~ +85°C								
Leakage current max.	$I = 0.05CV$ or $10\mu A$ whichever is greater (after 2 minutes)								
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	40	50	63
	$\tan\delta$	0.24	0.20	0.17	0.16	0.15	0.14	0.12	0.10
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16~25	35~63				
	Z-25°C/Z+20°C	4	3	2	2				
	Z-40°C/Z+20°C	8	6	4	4				
Load life (after application of the rated voltage for 2000 hours at 85°C)	Leakage current	Less than specified value							
	Capacitance change	Within $\pm 20\%$ of initial value							
	$\tan\delta$	Less than 200% of specified value							
	Test method	Polarity reverse each 250 hours							
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4								

● DRAWING

Unit : mm

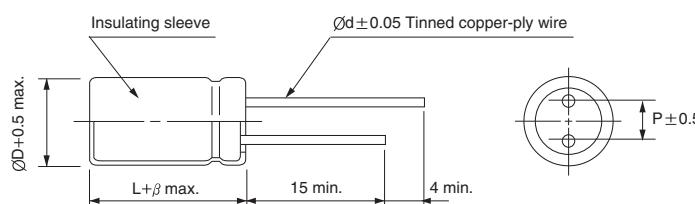

ØD	4	5	6.3
P	1.5	2.0	2.5
Ød	0.45	0.5	0.5
β	1.0	1.5	

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	6.3	10	16	25	35	40	50	63
1.0								4×7	13
1.5								4×7	16
2.2								4×7	19
3.3					4×7	20	4×7	18	5×7
4.7				4×7	23	4×7	24	5×7	25
6.8		4×7	26	5×7	32	5×7	33	6.3×7	39
10		4×7	31	5×7	39	6.3×7	47	6.3×7	48
15	4×7	35	5×7	44	6.3×7	55			
22	5×7	49	6.3×7	62	6.3×7	67			
33	6.3×7	69	6.3×7	76					
47	6.3×7	83							

Ripple current (mA rms) at 85°C, 120Hz
Case size ØD × L (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	1kHz	10kHz
Coefficient	0.75	1.00	1.55	2.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS


NE

Non-Polarized, Height 5mmL
Series



- Non-polarized and low profile series with 5mmL height
- Uniquely designed for use in lightweight and portable equipment
- Complied to the RoHS directive


SE → **NE**
Non-polar



Item	Characteristics									
Operating temperature range	-40 ~ +85°C									
Leakage current max.	$I = 0.05CV$ or $10\mu A$ whichever is greater (after 2 minutes)									
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	WV	6.3	10	16	25	35	50			
	$\tan\delta$	0.24	0.20	0.17	0.17	0.15	0.15			
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16, 25	35, 50					
	Z-25°C/Z+20°C	4	3	2	2					
	Z-40°C/Z+20°C	8	6	4	3					
Load life (after application of the rated voltage for 1000 hours at 85°C)	Leakage current	Less than specified value								
	Capacitance change	Within $\pm 20\%$ of initial value								
	$\tan\delta$	Less than 200% of specified value								
	Test method	Polarity reverse each 250 hours								
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4									

● DRAWING

Unit : mm

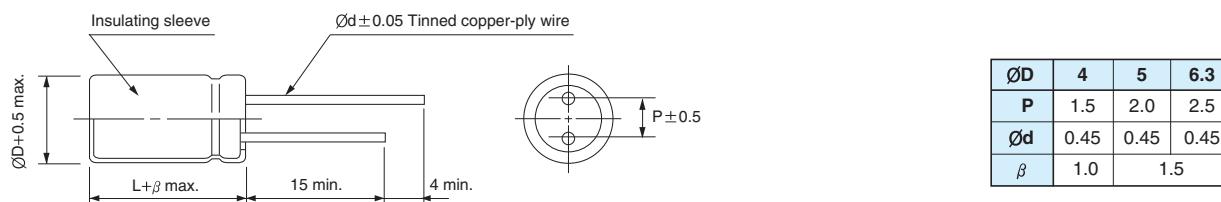

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

$\mu F \backslash WV$	6.3	10	16	25	35	50	
1.0							4×5 10
1.5							4×5 12
2.2				4×5	14	4×5	15 5×5 17
3.3				5×5	20	5×5	21 5×5 21
4.7			4×5	21	5×5	24	5×5 25 6.3×5 30
6.8			5×5	29	6.3×5	33	6.3×5 36 6.3×5 36
10		4×5	28	5×5	35	6.3×5	41 6.3×5 43
15	4×5	31	5×5	39	6.3×5	50	Ripple current (mA rms) at 85°C, 120Hz Case size ØD×L (mm)
22	5×5	43	6.3×5	55	6.3×5	60	
33	6.3×5	62	6.3×5	68			
47	6.3×5	74					

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

Frequency	50Hz	120Hz	1kHz	10kHz \leq
Coefficient	0.75	1.00	1.55	2.00


RN

Non-Polarized, Wide Temperature Range Series

NP
Non-polarized
N
Non-polar

S
Solvent Proof


- Wide operating temperature range of -40 ~ +105°C
- Designed for use in circuits with reversing polarity
- Complied to the RoHS directive

RD → **RN**
Non-polar

Item	Characteristics									
Operating temperature range	-40 ~ +105°C									
Leakage current max.	$I = 0.03CV$ or $3\mu A$ whichever is greater (after 5 minutes)									
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.									
	WV	6.3	10	16	25	35	50	63	80	100
	$\tan\delta$	0.24	0.20	0.16	0.16	0.14	0.12	0.12	0.12	0.12
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25 ~ 100					
	Z-25°C/Z+20°C	4	3	2	2					
	Z-40°C/Z+20°C	8	6	4	3					
Load life (after application of the rated voltage for 1000 hours at 105°C)	Leakage current	Less than specified value								
	Capacitance change	Within $\pm 20\%$ of initial value								
	$\tan\delta$	Less than 200% of specified value								
	Test method	Polarity reverse each 250 hours								
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4									

● DRAWING

Unit : mm

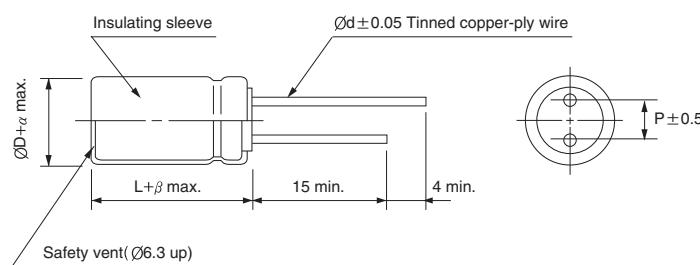

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α					0.5			1.0
β						2.0		3.0

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF	Frequency	50Hz	120Hz	1kHz	10kHz ≤
~ 47		0.75	1.00	1.55	2.00
68 ~ 680		0.80	1.00	1.34	1.50
1000 ~		0.85	1.00	1.13	1.15

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RN series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	6.3	10	16	25	35	50	63	80	100
1.0							5 × 11 11	5 × 11 12	5 × 11 12	
1.5							5 × 11 14	5 × 11 15	5 × 11 15	5 × 11 16
2.2							5 × 11 17	5 × 11 18	5 × 11 18	5 × 11 19
3.3							5 × 11 21	5 × 11 23	6.3 × 11 26	6.3 × 11 27
4.7						5 × 11 23	5 × 11 25	6.3 × 11 31	6.3 × 11 31	8 × 11.5 39
6.8					5 × 11 26	5 × 11 27	6.3 × 11 34	6.3 × 11 37	8 × 11.5 44	10 × 12.5 54
10				5 × 11 31	5 × 11 31	6.3 × 11 38	6.3 × 11 41	8 × 11.5 53	10 × 12.5 62	10 × 12.5 65
15			5 × 11 34	5 × 11 38	6.3 × 11 44	8 × 11.5 55	8 × 11.5 60	10 × 12.5 76	10 × 12.5 76	10 × 16 88
22		5 × 11 38	5 × 11 41	6.3 × 11 53	8 × 11.5 63	8 × 11.5 67	10 × 12.5 84	10 × 16 101	10 × 16 101	
33		5 × 11 46	6.3 × 11 58	8 × 11.5 77	8 × 11.5 77	10 × 12.5 95	10 × 16 113	10 × 16 124	10 × 20 135	
47		6.3 × 11 63	6.3 × 11 69	8 × 11.5 92	10 × 12.5 106	10 × 16 125	10 × 20 147	10 × 20 161	12.5 × 20 189	
68		6.3 × 11 76	8 × 11.5 98	10 × 12.5 128	10 × 16 140	10 × 20 164	10 × 20 177	12.5 × 20 227	12.5 × 25 248	
100		8 × 11.5 109	10 × 12.5 139	10 × 16 170	10 × 20 185	10 × 20 198	12.5 × 20 251	12.5 × 25 300	16 × 25 333	
150		10 × 12.5 155	10 × 16 186	10 × 20 227	12.5 × 20 267	12.5 × 20 285	12.5 × 25 336	16 × 25 408	16 × 35.5 468	
220		10 × 12.5 188	10 × 20 246	12.5 × 20 323	12.5 × 20 323	12.5 × 25 376	16 × 25 451	16 × 35.5 567	18 × 35.5 609	
330		10 × 16 252	12.5 × 20 354	12.5 × 20 396	12.5 × 25 431	16 × 25 511	16 × 35.5 634	18 × 35.5 745	18 × 40 782	
470		10 × 20 328	12.5 × 20 422	12.5 × 25 515	16 × 25 571	16 × 35.5 701	18 × 35.5 812	18 × 40 933	22 × 41 1027	
680		12.5 × 20 464	12.5 × 25 554	16 × 25 687	16 × 35.5 788	18 × 35.5 904	18 × 40 1025	22 × 41 1236		
1000		12.5 × 25 613	16 × 25 745	16 × 35.5 956	18 × 35.5 1026	18 × 40 1151	22 × 41 1368			
1500		16 × 25 800	16 × 35.5 999	18 × 35.5 1184	18 × 40 1243	22 × 41 1451				
2200		16 × 35.5 1072	18 × 35.5 1242	18 × 40 1428	22 × 41 1572					
3300		18 × 35.5 1361	18 × 40 1534	22 × 41 1835						
4700		18 × 40 1650	22 × 41 1942							
6800		22 × 41 2060								

Case size ØD × L (mm)
Ripple current (mA rms) at 105°C, 120Hz